Cover Styl

# B5

Golden Beech





## RANGE & FINISH

| | | | |
|---|---|---|---|
| FAMILY | **Wood** | SUB-FAMILY | **Medium** |
| FINISHES | **Standard** | SURFACE EFFECT | **Matt** |

## SAMPLES AVAILABLE

A5 SAMPLES

PREMIUM SAMPLES

## CHARACTERISTICS

| | |
|---|---|
| Width | **122 cm** |
| Length | **50 m** |
| Thickness | **250 µm** |
| Item weight | **250 - 360 g/m²** |
| Composition | **PVC** |
| Type of Adhesive | **Acrylic PSA with air release system** |
| Warranty | **10 years** |
| Storage Temperature | **5°C-30°C** |
| Storage in recommended conditions | **3 years** |
| Pattern Direction | **Length** |
| Wood Structure | **Knots** |

## PERFORMANCES

| | |
|---|---|
| Scratch resistance | **Average** |
| Stains resistance | **Passed** |
| Thermal Resistance | **Passed** |
| Water and Moisture resistance | **Passed** |
| Color Fastness to light | **Passed** |
| Adhesion | **Passed** |
| Antibacterial properties | **Passed** |
| Dimensional stability | **0.25 mm** |
| Washability | **Passed** |

## CERTIFICATIONS

| | | | |
|---|---|---|---|
| CE (CPR 305/2011)<br>**Compliant** | REACH / ROHS<br>**Compliant** | FIRE RATING (EN13501-1)<br>**C-s2,d0** | VOLATILE ORGANIC COMPOUNDS (EN16516) - A+<br>**Compliant** |
| RESTRICTED SUBSTANCES<br>**Compliant** | IMO/MED MODUL B - E<br>**Compliant** | RAIL (EN45545-2, R1)<br>**Compliant** | EPD AVAILABLE<br>**Available** |

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation

Cover Styl

B5

Golden Beech

## APPLICATION, INSTALLATION & MAINTAINANCE

### APPLICATION COMPATIBILITY

| | |
|---|---|
| Stretchable | **Yes** |
| Suitable for | **Interior** |
| Direct Water contact areas | **Yes** |
| Pattern continuity across panels | **Yes, with care** |
| Imperfect surfaces | **Yes, with care** |
| High contact wear surfaces | **Yes, with care** |

### INSTALLATION


| | |
|---|---|
| Installation Type | **Interior** |
| Installation Method | **Dry** |
| Installation Temperature | **12°C-38°C** |
| Installation Method (ABBA - ABAB) | **ABAB** |
| Pattern Repetition Length (cm) | **118 cm** |

### INSTALLATION GUIDELINES

- Install Cover Styl® film in a clean, dry and dust-free environment, with ambient and substrate temperatures between 12°C and 38°C. The substrate must be smooth, stable, clean, dry and free from dust, grease, silicone, wax and other contaminants.
- Repair surface defects and always perform an adhesion test, especially on unknown or treated substrates. Porous or absorbent surfaces may require specific preparation and a full-surface primer.
- Apply the film dry with a suitable felt squeegee, working progressively to remove air and ensure even adhesion.
- Use heat to conform the film around curves and complex shapes, while avoiding excessive stretching or overheating.
- Before installing multiple sheets, check the film direction, pattern repeat and the correct joint or overlap method.
- Use sharp blades without damaging the substrate. After installation, check the edges, joints and overall finish. Refer to the latest Cover Styl Technical Manual for substrate preparation, primer selection and installation techniques.

### MAINTENANCE GUIDELINES

For daily care, use a mild soap or pH-neutral detergent to clean the film's surface. Avoid using products with extremely acidic or basic pH levels, as they can harm the material. When cleaning the film surface, only use soft cloths or sponges to prevent any damage.
For stubborn stains, apply hot water (not boiling) to the affected area. If necessary, use a cleaning solution composed of 70% isopropyl alcohol and 30% water, applied with a melamine sponge.
For sanitizing, use only isopropyl alcohol-based products like Isopropyl Alcohol Wipes (not for daily use).
Avoid organic-based cleaners like ammonia or polish, as they can damage vinyl. Test any cleaning detergents, bactericides, or virucidal products on a hidden area first to ensure compatibility.

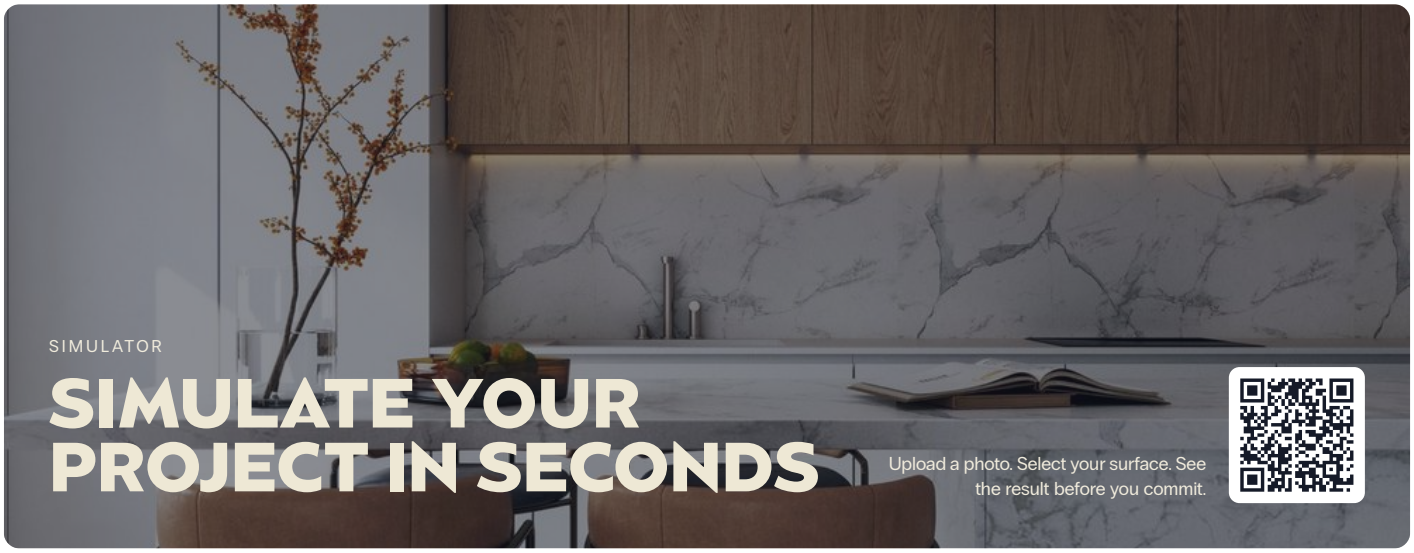


Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation