Cover Styl

# HR-NF40

**High Resistant - Classic Oak**

ALSO AVAILABLE IN ORIGINAL





## RANGE & FINISH

| | | | |
|---|---|---|---|
| FAMILY | **Wood** | SUB-FAMILY | **Light** |
| SURFACE EFFECT | **Matt** | | |

## SAMPLES AVAILABLE

A5 SAMPLES

## CHARACTERISTICS

| | |
|---|---|
| Width | **122 cm** |
| Length | **20 m** |
| Thickness | **450 µm** |
| Item weight | **540 g/m²** |
| Composition | **PVC** |
| Type of Adhesive | **Acrylic PSA with air release system** |
| Warranty | **10 years** |
| Storage Temperature | **5°C-30°C** |
| Storage in recommended conditions | **3 years** |
| Pattern Direction | **Length** |

## PERFORMANCES

| | |
|---|---|
| Scratch resistance | **High** |
| Stains resistance | **Not Tested** |
| Thermal Resistance | **Not Tested** |
| Water and Moisture resistance | **Not Tested** |
| Color Fastness to light | **Not Tested** |
| Adhesion | **Passed** |
| Antibacterial properties | **Not Tested** |
| Washability | **Not Tested** |

## CERTIFICATIONS

| | | | |
|---|---|---|---|
| CE (CPR 305/2011)<br>**Compliant** | REACH / ROHS<br>**Compliant** | FIRE RATING (EN13501-1)<br>**D-s2,d0** | VOLATILE ORGANIC COMPOUNDS (EN16516) - A+<br>Not Tested |
| RESTRICTED SUBSTANCES<br>Not Tested | IMO/MED MODUL B - E<br>Not Tested | RAIL (EN45545-2, R1)<br>Not Tested | EPD AVAILABLE<br>**Not Available** |

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation

Cover Styl

# HR-NF40

**High Resistant - Classic Oak**

## APPLICATION, INSTALLATION & MAINTAINANCE

### APPLICATION COMPATIBILITY

| | |
|---|---|
| Stretchable | **Yes** |
| Suitable for | **Interior** |
| Direct Water contact areas | **Yes** |
| Pattern continuity across panels | **Yes, with care** |
| Imperfect surfaces | **Yes, with care** |
| High contact wear surfaces | **Yes** |

### INSTALLATION


| | |
|---|---|
| Installation Type | **Interior** |
| Installation Method | **Dry** |
| Installation Temperature | **12°C-38°C** |
| Installation Method (ABBA - ABAB) | **ABAB** |
| Pattern Repetition Length (cm) | **134 cm** |
| Overlap to match Layers (cm) | **37.5 cm** |

### INSTALLATION GUIDELINES

- Pre-cut the film in areas where cutting or trimming after application may be difficult, particularly around backsplashes, edges, and corners.
- Due to the increased thickness and density of the material, test cutting, trimming, and thermoforming techniques before installation.
- For 90° corners, where applicable, thermoforming is recommended, as overlaps may remain visible due to the thickness of the material.
- When using a cut-and-overlap technique, SOTT Corner Sealer (400-CS01) can be used to conceal any visible white edges.
- Glossy High Resistance finishes are not thermoformable.
- Despite their increased thickness, non-glossy High Resistance films behave similarly to standard Cover Styl films during installation, including during thermoforming.

### MAINTENANCE GUIDELINES

For daily care, use a mild soap or pH-neutral detergent to clean the film's surface. Avoid using products with extremely acidic or basic pH levels, as they can harm the material. When cleaning the film surface, only use soft cloths or sponges to prevent any damage.
For stubborn stains, apply hot water (not boiling) to the affected area. If necessary, use a cleaning solution composed of 70% isopropyl alcohol and 30% water, applied with a melamine sponge.
For sanitizing, use only isopropyl alcohol-based products like Isopropyl Alcohol Wipes (not for daily use). Avoid organic-based cleaners like ammonia or polish, as they can damage vinyl. Test any cleaning detergents, bactericides, or virucidal products on a hidden area first to ensure compatibility.

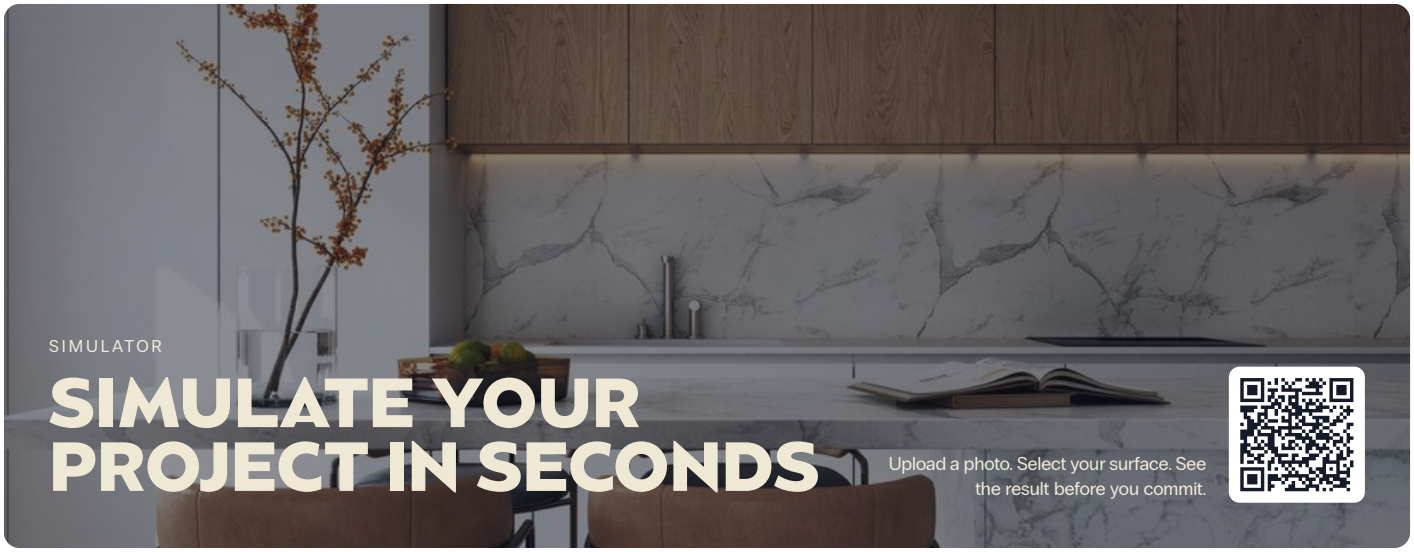


Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation