



RANGE & FINISH

FAMILY	Steel	SUB-FAMILY	Brushed
FINISHES	Prestige	SURFACE EFFECT	Metallic

SAMPLES AVAILABLE

- A5 SAMPLES
- PREMIUM SAMPLES

CHARACTERISTICS

Width	122 cm
Length	50 m
Thickness	230 µm
Item weight	270 - 290 g/m²
Composition	PVC
Type of Adhesive	Acrylic PSA with air release system
Warranty	10 years
Storage Temperature	5°C-30°C
Storage in recommended conditions	3 years
Pattern Direction	Width

PERFORMANCES

Scratch resistance	High
Stains resistance	Passed
Thermal Resistance	Passed
Water and Moisture resistance	Passed
Color Fastness to light	Not Tested
Adhesion	Passed
Antibacterial properties	Passed
Washability	Passed

CERTIFICATIONS

CE (CPR 305/2011) Compliant	REACH / ROHS Compliant	FIRE RATING (EN13501-1) D-s1,d0	VOLATILE ORGANIC COMPOUNDS (EN16516) - A+ Compliant
RESTRICTED SUBSTANCES Compliant	IMO/MED MODUL B - E Compliant	RAIL (EN45545-2, R1) Not Tested	EPD AVAILABLE Not Available

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	Not Suitable
Suitable for	Interior
Direct Water contact areas	Yes
Pattern continuity across panels	Yes
Imperfect surfaces	Yes, with care
High contact wear surfaces	Yes, with care

INSTALLATION

Installation Type	Interior
Installation Method	Dry
Installation Temperature	12°C-38°C
Installation Method (ABBA - ABAB)	ABBA

INSTALLATION GUIDELINES


- Apply only to a perfectly clean and properly prepared substrate, in a clean installation environment.
- When wrapping edges / arris, heat the film and maintain a consistent temperature during the folding process to improve flexibility and reduce the risk of air channels along the edges.
- For AU01 and AU02, use a soft felt squeegee to minimize the risk of scratching.
- If the film needs to be lifted during installation to remove dust or wrinkles, handle it carefully, as excessive manipulation may leave irreversible marks.
- Mirror film: due to its specific construction, apply only on flat surfaces and do not bend, fold, or wrap the material over edges or corners.
- When trimming an overlap directly over the film, protect the area beforehand with masking tape to reduce the risk of surface delamination.

MAINTENANCE GUIDELINES

For daily care, use a mild soap or pH-neutral detergent to clean the film's surface. Avoid using products with extremely acidic or basic pH levels, as they can harm the material. When cleaning the film surface, only use soft cloths or sponges to prevent any damage.

For stubborn stains, apply hot water (not boiling) to the affected area. If necessary, use a cleaning solution composed of 70% isopropyl alcohol and 30% water, applied with a melamine sponge.

For sanitizing, use only isopropyl alcohol-based products like Isopropyl Alcohol Wipes (not for daily use). Avoid organic-based cleaners like ammonia or polish, as they can damage vinyl. Test any cleaning detergents, bactericides, or virucidal products on a hidden area first to ensure compatibility.

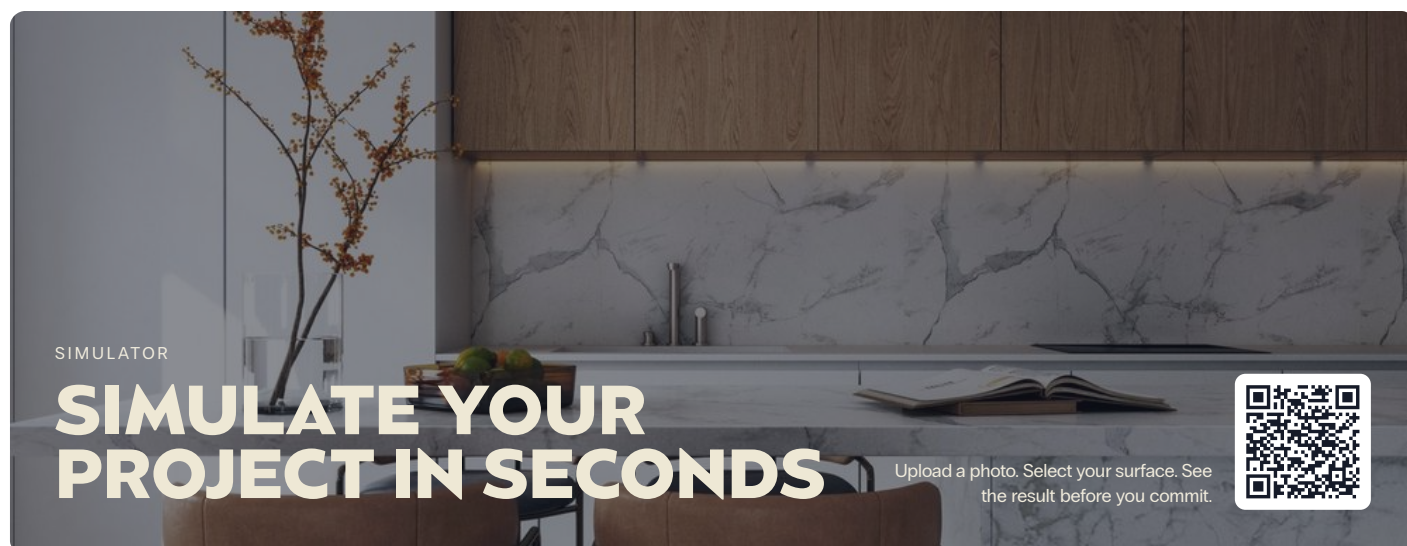

SIMULATOR

SIMULATE YOUR PROJECT IN SECONDS

Upload a photo. Select your surface. See the result before you commit.

