Cover Styl

# LP09

Eclipse





## RANGE & FINISH

| | | | |
|---|---|---|---|
| FAMILY | **Textile** | SUB-FAMILY | **Leather** |
| FINISHES | **Premium** | SURFACE EFFECT | **Matt** |

## SAMPLES AVAILABLE

A5 SAMPLES

PREMIUM SAMPLES

## CHARACTERISTICS

| | |
|---|---|
| Width | **122 cm** |
| Length | **10 m** |
| Thickness | **1050 µm** |
| Item weight | **745 g/m²** |
| Composition | **PVC** |
| Type of Adhesive | **Acrylic PSA with air release system** |
| Warranty | **5 years** |
| Storage Temperature | **5°C-30°C** |
| Storage in recommended conditions | **2 years** |
| Pattern Direction | **Not Visible** |

## PERFORMANCES

| | |
|---|---|
| Scratch resistance | **Average** |
| Stains resistance | **Not Tested** |
| Thermal Resistance | **Not Tested** |
| Water and Moisture resistance | **Not Tested** |
| Color Fastness to light | **Not Tested** |
| Adhesion | **Not Tested** |
| Antibacterial properties | **Not Tested** |
| Washability | **Not Tested** |

## CERTIFICATIONS

| | | | |
|---|---|---|---|
| CE (CPR 305/2011)<br>**Compliant** | REACH / ROHS<br>**Compliant** | FIRE RATING (EN13501-1)<br>**M1 (NF P92-507)** | VOLATILE ORGANIC COMPOUNDS (EN16516) - A+<br>**Not Tested** |
| RESTRICTED SUBSTANCES<br>**Not Tested** | IMO/MED MODUL B - E<br>**Not Tested** | RAIL (EN45545-2, R1)<br>**Not Tested** | EPD AVAILABLE<br>**Not Available** |

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation

Cover Styl

# LP09

Eclipse

## APPLICATION, INSTALLATION & MAINTAINANCE

### APPLICATION COMPATIBILITY

| | |
|---|---|
| Stretchable | **Not Suitable** |
| Suitable for | **Interior** |
| Direct Water contact areas | **Not Suitable** |
| Pattern continuity across panels | **Yes** |
| Imperfect surfaces | **Yes, with care** |
| High contact wear surfaces | **Not Suitable** |

### INSTALLATION


| | |
|---|---|
| Installation Type | **Interior** |
| Installation Method | **Dry** |
| Installation Temperature | **12°C-38°C** |
| Installation Method (ABBA - ABAB) | **ABAB** |

### INSTALLATION GUIDELINES

- The substrate must be perfectly smooth, clean, and dry.
- Apply without tension using a soft felt squeegee.
- Where two sheets meet at a corner or joint, use the double-cut technique instead of overlapping.
- Avoid multi-panel installations on large wall surfaces.
- Removal may leave adhesive residue.
- Recommended applications: vertical decorative surfaces and furniture. Not recommended for flooring or horizontal surfaces subject to heavy traffic.

### MAINTENANCE GUIDELINES

For daily care, use a mild soap or pH-neutral detergent to clean the film's surface. Avoid using products with extremely acidic or basic pH levels, as they can harm the material. When cleaning the film surface, only use soft cloths or sponges to prevent any damage.
For stubborn stains, apply hot water (not boiling) to the affected area. If necessary, use a cleaning solution composed of 70% isopropyl alcohol and 30% water, applied with a melamine sponge.
For sanitizing, use only isopropyl alcohol-based products like Isopropyl Alcohol Wipes (not for daily use). Avoid organic-based cleaners like ammonia or polish, as they can damage vinyl. Test any cleaning detergents, bactericides, or virucidal products on a hidden area first to ensure compatibility.

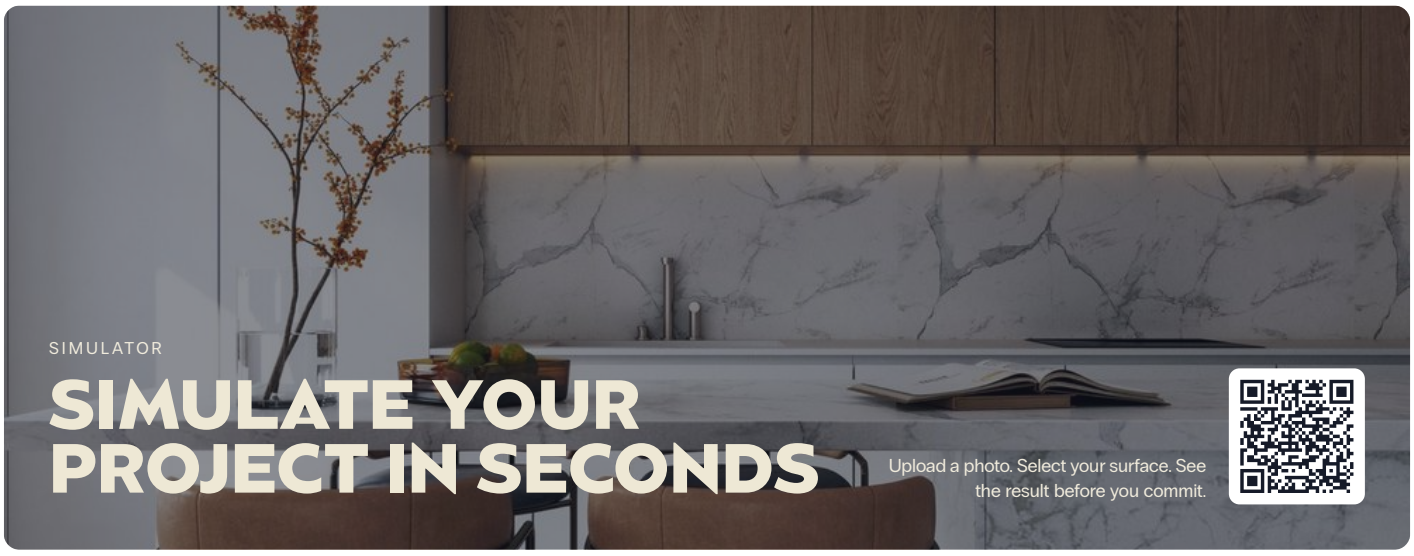


Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation