



RANGE & FINISH

FAMILY	Color	SUB-FAMILY	Silk
FINISHES	Premium	SURFACE EFFECT	Silk

SAMPLES AVAILABLE

[A5 SAMPLES](#)[PREMIUM SAMPLES](#)

CHARACTERISTICS

Width	122 cm
Length	50 m
Thickness	220 µm
Item weight	270 - 300 g/m²
Composition	PVC
Type of Adhesive	Acrylic PSA with air release system
Warranty	10 years
Storage Temperature	5°C-30°C
Storage in recommended conditions	3 years
Pattern Direction	Not Visible
RAL Color	6028

PERFORMANCES

Scratch resistance	High
Stains resistance	Passed
Thermal Resistance	Passed
Water and Moisture resistance	Passed
Color Fastness to light	Not Tested
Adhesion	Passed
Antibacterial properties	Passed
Dimensional stability	0.25 mm
Washability	Passed

CERTIFICATIONS

CE (CPR 305/2011)
Compliant

REACH / ROHS
Compliant

FIRE RATING (EN13501-1)
C-s2,d0

VOLATILE ORGANIC COMPOUNDS
(EN16516) - A+
Compliant

RESTRICTED SUBSTANCES
Compliant

IMO/MED MODUL B - E
Compliant

RAIL (EN45545-2, R1)
Not Tested

EPD AVAILABLE
Available

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	Not Suitable
Suitable for	Interior
Direct Water contact areas	Yes
Pattern continuity across panels	Yes
Imperfect surfaces	Yes, with care
High contact wear surfaces	Yes, with care

INSTALLATION

Installation Type	Interior
Installation Method	Dry
Installation Temperature	12°C-38°C
Installation Method (ABBA - ABAB)	ABBA

INSTALLATION GUIDELINES

- Silk features a special anti-fingerprint surface treatment.
- Due to its specific construction, stretching of the film may cause the surface coating to crack.
- Due to its specific surface construction, the material is more rigid and may be more sensitive to sharp cuts and low temperatures.
- Before installation, allow the film to reach room temperature and handle the roll carefully.
- Where a sharp cut could initiate a tear, use a rounded cut to reduce stress concentration.
- In overlap areas, the use of Primer PRO is mandatory. Do not use Primer+ or solvent-based primers, as they may permanently compromise adhesion in overlap areas.
- Use of the specified primer is a mandatory condition for warranty validity.


MAINTENANCE GUIDELINES

For daily care, use a mild soap or pH-neutral detergent to clean the film's surface. Avoid using products with extremely acidic or basic pH levels, as they can harm the material. When cleaning the film surface, only use soft cloths or sponges to prevent any damage.

For stubborn stains, apply hot water (not boiling) to the affected area. If necessary, use a cleaning solution composed of 70% isopropyl alcohol and 30% water, applied with a melamine sponge.

For sanitizing, use only isopropyl alcohol-based products like Isopropyl Alcohol Wipes (not for daily use).

Avoid organic-based cleaners like ammonia or polish, as they can damage vinyl. Test any cleaning detergents, bactericides, or virucidal products on a hidden area first to ensure compatibility.

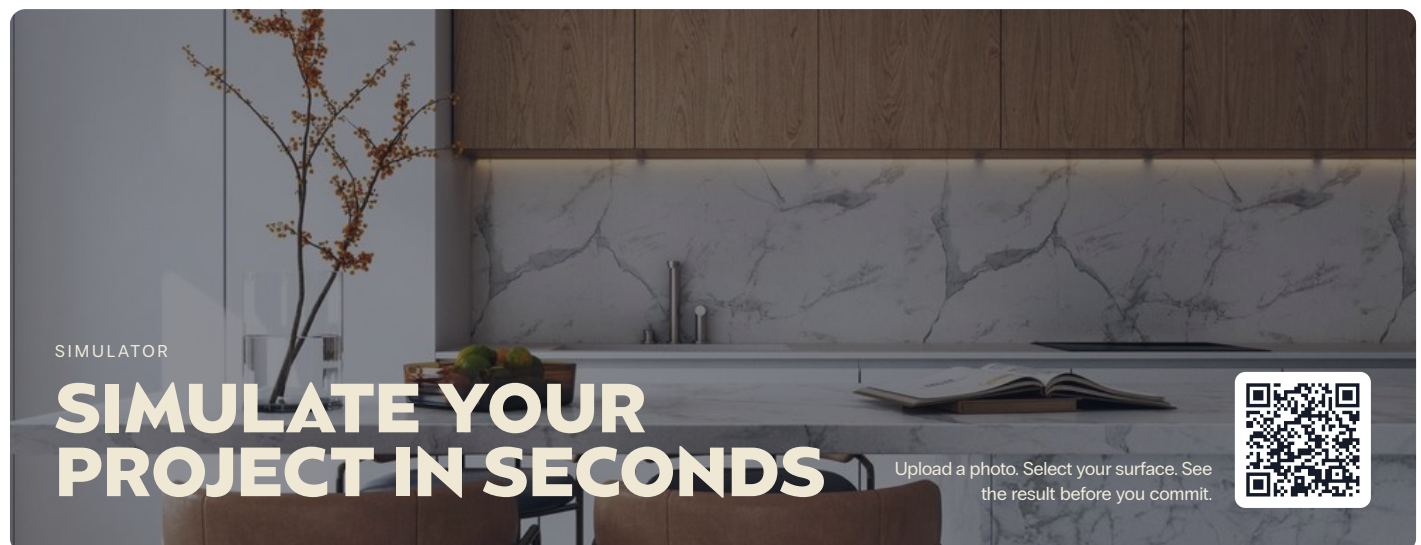

SIMULATOR

SIMULATE YOUR PROJECT IN SECONDS

Upload a photo. Select your surface. See the result before you commit.

