


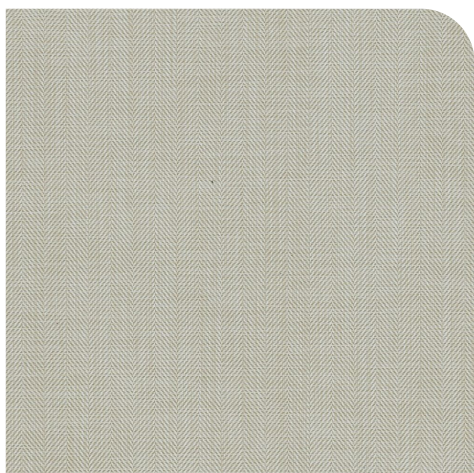

RANGE & FINISH

FAMILY	Textile	SUB-FAMILY	Natural
FINISHES	Prestige	SURFACE EFFECT	Matt

SAMPLES AVAILABLE

[A5 SAMPLES](#)[PREMIUM SAMPLES](#)

CHARACTERISTICS

Width	122 cm
Length	30 m
Thickness	450 µm
Item weight	460 g/m²
Composition	PVC
Type of Adhesive	Acrylic PSA with air release system
Warranty	10 years
Storage Temperature	5°C-30°C
Storage in recommended conditions	3 years
Pattern Direction	Length

PERFORMANCES

Scratch resistance	Average
Stains resistance	Passed
Thermal Resistance	Passed
Water and Moisture resistance	Not Compliant
Color Fastness to light	Not Tested
Adhesion	Passed
Antibacterial properties	Not Tested
Washability	Not Tested

CERTIFICATIONS

CE (CPR 305/2011) Compliant	REACH / ROHS Compliant	FIRE RATING (EN13501-1) D-s2,d0	VOLATILE ORGANIC COMPOUNDS (EN16516) - A+ Compliant
RESTRICTED SUBSTANCES Compliant	IMO/MED MODUL B - E Not Compliant	RAIL (EN45545-2, R1) Not Tested	EPD AVAILABLE Not Available

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	Yes
Suitable for	Interior
Direct Water contact areas	Yes
Pattern continuity across panels	Yes, with care
Imperfect surfaces	Yes, with care
High contact wear surfaces	Yes, with care

INSTALLATION

Installation Type	Interior
Installation Method	Dry
Installation Temperature	12°C-38°C
Installation Method (ABBA - ABAB)	ABBA
Overlap to match Layers (cm)	16 cm

INSTALLATION GUIDELINES


- Cut carefully to minimise fraying of the textile surface.
- In overlap areas, gently heat the film to promote adhesion.
- In high-traffic areas, overlaps may be subject to lifting due to mechanical stress.
- On edges and raised surfaces, ensure complete adhesion without trapped air and wrap the material at least 10 mm around the edge, preferably further where possible.
- Minor liner shrinkage may occur while the product is stored on the roll; this does not affect the dimensional stability of the material once installed.
- After use, secure the roll tightly at a minimum of three points to prevent air channels from developing between the film and liner.
- For NG07 and NG09, due to their specific construction, slight colour variations may occur between adjacent sheets, even when taken from the same roll.

MAINTENANCE GUIDELINES

For daily care, use a mild soap or pH-neutral detergent to clean the film's surface. Avoid using products with extremely acidic or basic pH levels, as they can harm the material. When cleaning the film surface, only use soft cloths or sponges to prevent any damage.

For stubborn stains, apply hot water (not boiling) to the affected area. If necessary, use a cleaning solution composed of 70% isopropyl alcohol and 30% water, applied with a melamine sponge.

For sanitizing, use only isopropyl alcohol-based products like Isopropyl Alcohol Wipes (not for daily use). Avoid organic-based cleaners like ammonia or polish, as they can damage vinyl. Test any cleaning detergents, bactericides, or virucidal products on a hidden area first to ensure compatibility.

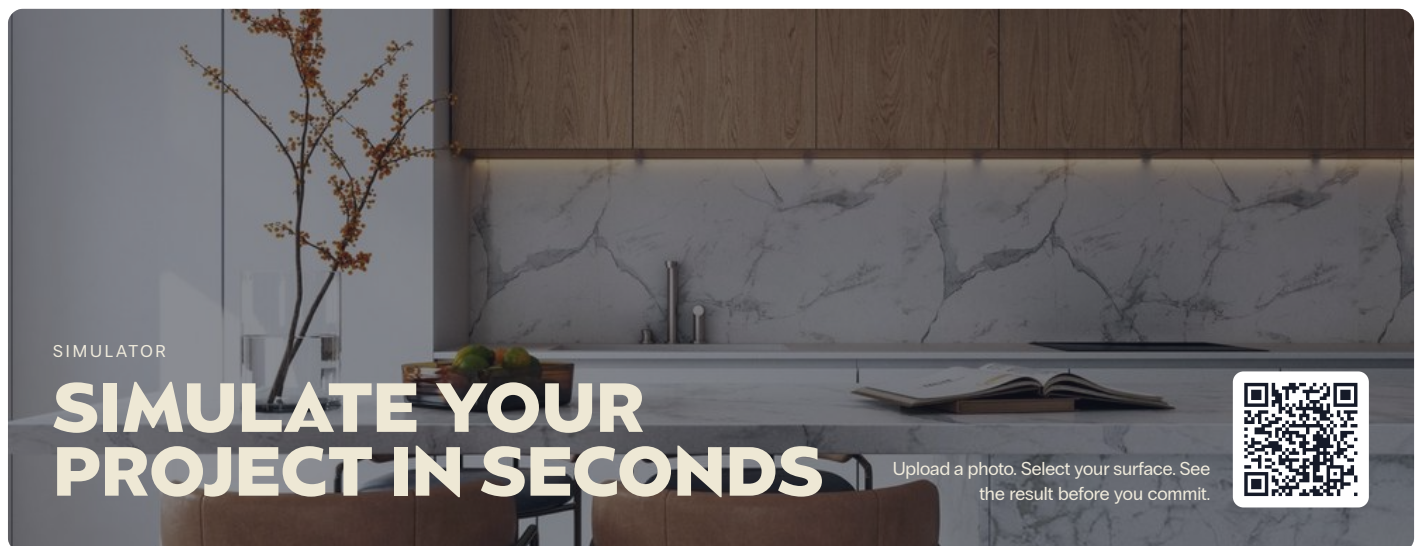

SIMULATOR

SIMULATE YOUR PROJECT IN SECONDS

Upload a photo. Select your surface. See the result before you commit.

