


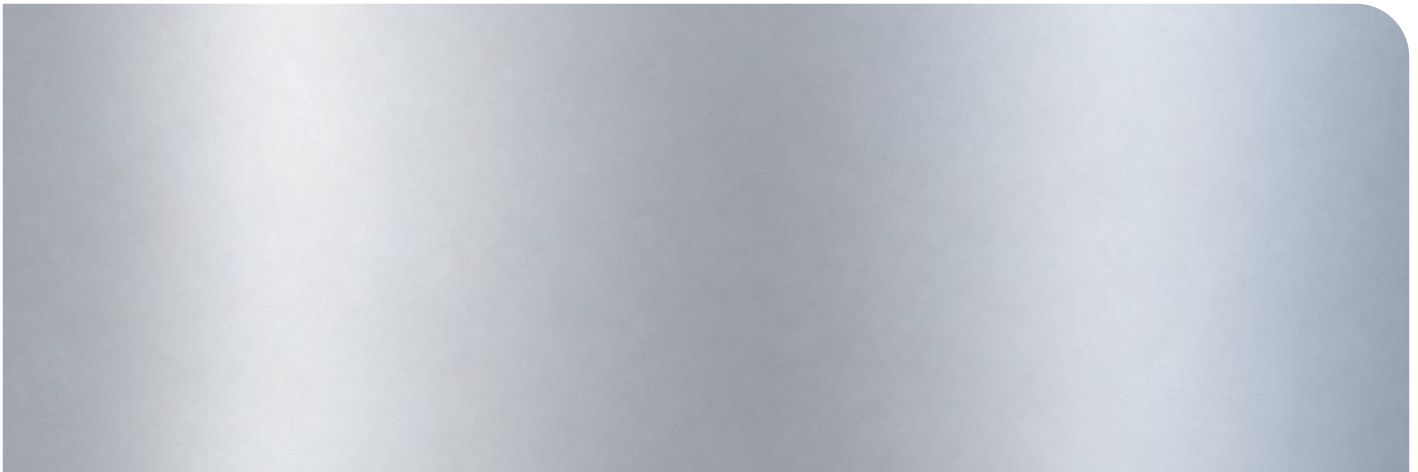

RANGE & FINISH

FAMILY	Steel	SUB-FAMILY	Luminous
FINISHES	Prestige	SURFACE EFFECT	Metallic

SAMPLES AVAILABLE

A5 SAMPLES

PREMIUM SAMPLES

CHARACTERISTICS

Width	122 cm
Length	30 m
Thickness	230 µm
Item weight	305 g/m²
Composition	PET
Type of Adhesive	Acrylic PSA with air release system
Warranty	5 years
Storage Temperature	5°C-30°C
Storage in recommended conditions	1 years
Pattern Direction	Not Visible

PERFORMANCES

Scratch resistance	Average
Stains resistance	Not Tested
Thermal Resistance	Not Tested
Water and Moisture resistance	Not Tested
Color Fastness to light	Not Tested
Adhesion	Not Tested
Antibacterial properties	Not Tested
Washability	Not Tested

CERTIFICATIONS

CE (CPR 305/2011) Compliant	REACH / ROHS Compliant	FIRE RATING (EN13501-1) C-s1,d0	VOLATILE ORGANIC COMPOUNDS (EN16516) - A+ Not Tested
RESTRICTED SUBSTANCES Not Tested	IMO/MED MODUL B - E Not Tested	RAIL (EN45545-2, R1) Not Tested	EPD AVAILABLE Not Available

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	Not Suitable
Suitable for	Interior
Direct Water contact areas	Yes
Pattern continuity across panels	Yes
Imperfect surfaces	Not Suitable
High contact wear surfaces	Yes, with care

INSTALLATION

Installation Type	Interior
Installation Method	Dry
Installation Temperature	12°C-38°C
Installation Method (ABBA - ABAB)	ABBA

INSTALLATION GUIDELINES


- Apply only to a perfectly clean and properly prepared substrate, in a clean installation environment.
- When wrapping edges / arris, heat the film and maintain a consistent temperature during the folding process to improve flexibility and reduce the risk of air channels along the edges.
- For AU01 and AU02, use a soft felt squeegee to minimize the risk of scratching.
- If the film needs to be lifted during installation to remove dust or wrinkles, handle it carefully, as excessive manipulation may leave irreversible marks.
- Mirror film: due to its specific construction, apply only on flat surfaces and do not bend, fold, or wrap the material over edges or corners.
- When trimming an overlap directly over the film, protect the area beforehand with masking tape to reduce the risk of surface delamination.

MAINTENANCE GUIDELINES

For AU01, AU02 and Mirror, always use a clean, soft, fine-grain microfiber cloth to minimize the risk of scratching the surface.

Clean with Surface Cleaner or a suitable alcohol-based cleaning product, and do not allow liquids or cleaning products to dry on the film, as this may leave visible stains or marks.

Wipe gently and dry the surface immediately with a clean microfiber cloth.

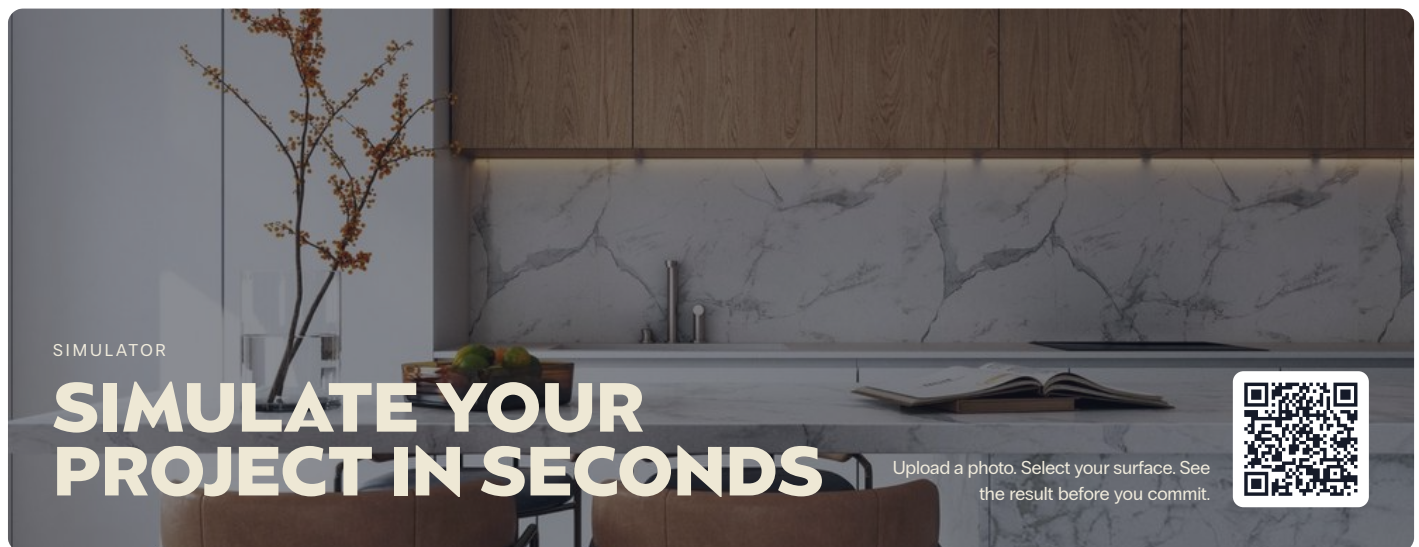

SIMULATOR

SIMULATE YOUR PROJECT IN SECONDS

Upload a photo. Select your surface. See the result before you commit.

