Cover Styl

NL2

Mirror Gold





RANGE & FINISH

FAMILY	**Steel**	SUB-FAMILY	**Luminous**
FINISHES	**Prestige**	SURFACE EFFECT	**Metallic**

SAMPLES AVAILABLE

A5 SAMPLES

PREMIUM SAMPLES

CHARACTERISTICS

Width	**122 cm**
Length	**30 m**
Thickness	**230 µm**
Item weight	**305 g/m²**
Composition	**PET**
Type of Adhesive	**Acrylic PSA with air release system**
Warranty	**5 years**
Storage Temperature	**5°C-30°C**
Storage in recommended conditions	**1 years**
Pattern Direction	**Not Visible**

PERFORMANCES

Scratch resistance	**Average**
Stains resistance	**Not Tested**
Thermal Resistance	**Not Tested**
Water and Moisture resistance	**Not Tested**
Color Fastness to light	**Not Tested**
Adhesion	**Not Tested**
Antibacterial properties	**Not Tested**
Washability	**Not Tested**

CERTIFICATIONS

CE (CPR 305/2011) **Compliant**	REACH / ROHS **Compliant**	FIRE RATING (EN13501-1) **C-s1,d0**	VOLATILE ORGANIC COMPOUNDS (EN16516) - A+ Not Tested
RESTRICTED SUBSTANCES Not Tested	IMO/MED MODUL B - E Not Tested	RAIL (EN45545-2, R1) Not Tested	EPD AVAILABLE **Not Available**

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation

Cover Styl

NL2

Mirror Gold

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	**Not Suitable**
Suitable for	**Interior**
Direct Water contact areas	**Yes**
Pattern continuity across panels	**Yes**
Imperfect surfaces	**Not Suitable**
High contact wear surfaces	**Yes, with care**

INSTALLATION

Installation Type	**Interior**
Installation Method	**Dry**
Installation Temperature	**12°C-38°C**
Installation Method (ABBA - ABAB)	**ABAB**

INSTALLATION GUIDELINES

- Product Characteristics: Rigid polyester (PET) mirror film with high optical reflection and a delicate metallized surface layer. Available in Classic Silver (NL1) and Gold (NL2). Features a protective surface liner to prevent installation marks, to be removed only after completion. No UV resistance.
- Application: Interior flat and planar surfaces only. Not suitable for curved surfaces, tight radius, or sharp edges. Do not stretch or thermoform. Not recommended for humid environments or areas with permanent contact with liquids.
- Surface Preparation: Apply only on perfectly smooth, rigid, and clean surfaces free of contamination. Any underlying texture or impurity will be magnified and distort the final reflection.
- Application Method: Dry installation only. Wet application (water and soap/solutions) is strictly prohibited as liquids can cause oxidation or delamination. Keep the protective liner on during squeegeeing and peel off only when finished.
- Restrictions: Do not apply other films, graphics, or adhesives over the mirrored surface. Plotter cutting and printing alter product durability and immediately void all warranties and certifications.

MAINTENANCE GUIDELINES

Cleaning: Clean exclusively with water and a soft microfiber cloth, using light, gentle movements without pressure. Mild neutral detergent (neutral dish soap or Marseille soap) in small amounts can be used for persistent dirt.

Chemical Restrictions: Strictly prohibited: alcohol, acetone, solvents, strong degreasers, bleach, ammonia-based products, abrasive polishes, or steel creams. They cause irreversible opacity or delamination.

Tool Restrictions: Avoid abrasive sponges, scrapers, metallic pads, or stiff brushes. A single pass leaves micro-scratches immediately visible on the mirror surface.

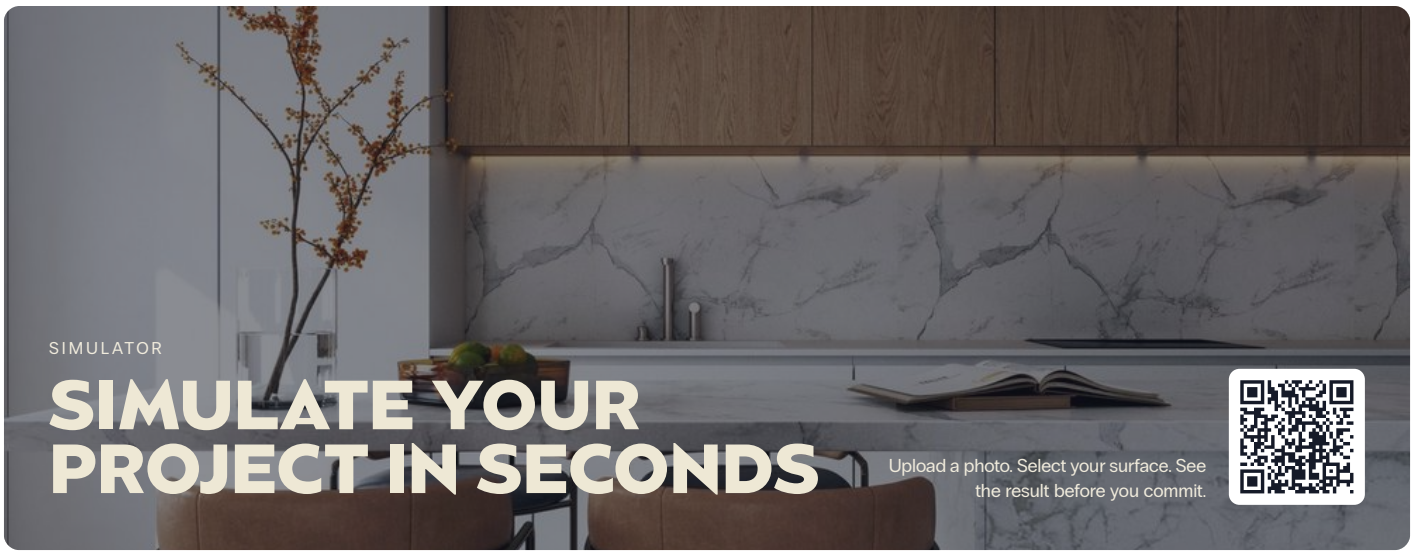

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation