
Cover Styl

NL24

Herringbone Beige



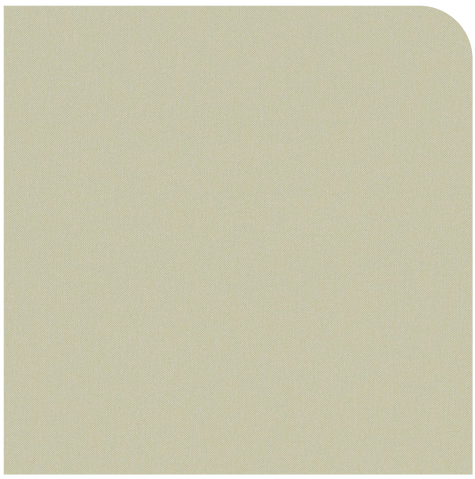

RANGE & FINISH

FAMILY	**Textile**	SUB-FAMILY	**Natural**
FINISHES	**Prestige**	SURFACE EFFECT	**Matt**

SAMPLES AVAILABLE

A5 SAMPLES

PREMIUM SAMPLES

CHARACTERISTICS

Width	**122 cm**
Length	**30 m**
Thickness	**220 µm**
Item weight	**250 - 360 g/m²**
Composition	**PVC**
Type of Adhesive	**Acrylic PSA with air release system**
Warranty	**10 years**
Storage Temperature	**5°C-30°C**
Storage in recommended conditions	**3 years**
Pattern Direction	**Not Visible**

PERFORMANCES

Scratch resistance	**Average**
Stains resistance	**Passed**
Thermal Resistance	**Passed**
Water and Moisture resistance	**Not Tested**
Color Fastness to light	**Not Tested**
Adhesion	**Passed**
Antibacterial properties	**Not Tested**
Washability	**Not Tested**

CERTIFICATIONS

CE (CPR 305/2011) **Compliant**	REACH / ROHS **Compliant**	FIRE RATING (EN13501-1) **D-s2,d0**	VOLATILE ORGANIC COMPOUNDS (EN16516) - A+ **Compliant**
RESTRICTED SUBSTANCES **Compliant**	IMO/MED MODUL B - E **Not Compliant**	RAIL (EN45545-2, R1) **Not Tested**	EPD AVAILABLE **Not Available**

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation

Cover Styl

NL24

Herringbone Beige

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	**Yes**
Suitable for	**Interior**
Direct Water contact areas	**Not Suitable**
Pattern continuity across panels	**Yes**
Imperfect surfaces	**Yes, with care**
High contact wear surfaces	**Not Suitable**

INSTALLATION


Installation Type	**Interior**
Installation Method	**Dry**
Installation Temperature	**12°C-38°C**
Installation Method (ABBA - ABAB)	**ABAB**

INSTALLATION GUIDELINES

- Cut carefully to minimise fraying of the textile surface.
- In overlap areas, gently heat the film to promote adhesion.
- In high-traffic areas, overlaps may be subject to lifting due to mechanical stress.
- On edges and raised surfaces, ensure complete adhesion without trapped air and wrap the material at least 10 mm around the edge, preferably further where possible.
- Minor liner shrinkage may occur while the product is stored on the roll; this does not affect the dimensional stability of the material once installed.
- After use, secure the roll tightly at a minimum of three points to prevent air channels from developing between the film and liner.
- For NG07 and NG09, due to their specific construction, slight colour variations may occur between adjacent sheets, even when taken from the same roll.

MAINTENANCE GUIDELINES

For daily care, use a mild soap or pH-neutral detergent to clean the film's surface. Avoid using products with extremely acidic or basic pH levels, as they can harm the material. When cleaning the film surface, only use soft cloths or sponges to prevent any damage.
For stubborn stains, apply hot water (not boiling) to the affected area. If necessary, use a cleaning solution composed of 70% isopropyl alcohol and 30% water, applied with a melamine sponge.
For sanitizing, use only isopropyl alcohol-based products like Isopropyl Alcohol Wipes (not for daily use). Avoid organic-based cleaners like ammonia or polish, as they can damage vinyl. Test any cleaning detergents, bactericides, or virucidal products on a hidden area first to ensure compatibility.

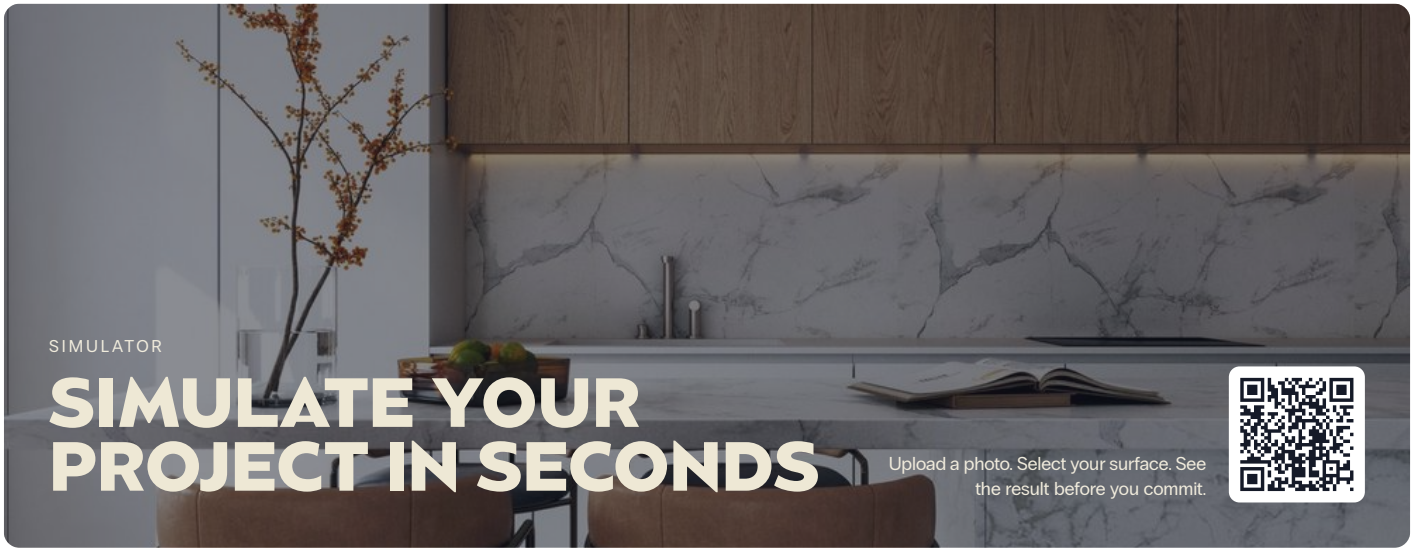

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation