



RANGE & FINISH

FAMILY	Textile	SUB-FAMILY	Raffia
FINISHES	Premium	SURFACE EFFECT	Matt

SAMPLES AVAILABLE

[A5 SAMPLES](#)[PREMIUM SAMPLES](#)

CHARACTERISTICS

Width	122 cm
Length	20 m
Thickness	640 µm
Item weight	340 g/m²
Composition	14
Type of Adhesive	Acrylic PSA with air release system
Warranty	5 years
Storage Temperature	5°C-30°C
Storage in recommended conditions	1 years
Pattern Direction	Not Visible

PERFORMANCES

Scratch resistance	Average
Stains resistance	Not Tested
Thermal Resistance	Not Tested
Water and Moisture resistance	Not Tested
Color Fastness to light	Not Tested
Adhesion	Not Tested
Antibacterial properties	Not Tested
Washability	Not Tested

CERTIFICATIONS

CE (CPR 305/2011) Compliant	REACH / ROHS Compliant	FIRE RATING (EN13501-1) D-s1,d0	VOLATILE ORGANIC COMPOUNDS (EN16516) - A+ Not Tested
RESTRICTED SUBSTANCES Not Tested	IMO/MED MODUL B - E Not Tested	RAIL (EN45545-2, R1) Not Tested	EPD AVAILABLE Not Available

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	Not Suitable
Suitable for	Interior
Direct Water contact areas	Not Suitable
Pattern continuity across panels	Yes, with care
Imperfect surfaces	Yes, with care
High contact wear surfaces	Not Suitable

INSTALLATION

Installation Type	Interior
Installation Method	Dry
Installation Temperature	12°C-38°C
Installation Method (ABBA - ABAB)	ABBA


INSTALLATION GUIDELINES

- Cut carefully to minimise fraying of the textile surface.
- In overlap areas, gently heat the film to promote adhesion.
- In high-traffic areas, overlaps may be subject to lifting due to mechanical stress.
- On edges and raised surfaces, ensure complete adhesion without trapped air and wrap the material at least 10 mm around the edge, preferably further where possible.
- Minor liner shrinkage may occur while the product is stored on the roll; this does not affect the dimensional stability of the material once installed.
- After use, secure the roll tightly at a minimum of three points to prevent air channels from developing between the film and liner.
- For NG07 and NG09, due to their specific construction, slight colour variations may occur between adjacent sheets, even when taken from the same roll.

MAINTENANCE GUIDELINES

For Cork or Raffia references, minimal cleaning and care are required due to their natural resistance to dust and dirt. Use a brush with gentle bristles to clean.

In case of wet or damp stains, use an absorbent cloth to wipe away the moisture and promptly and thoroughly dry the affected area.

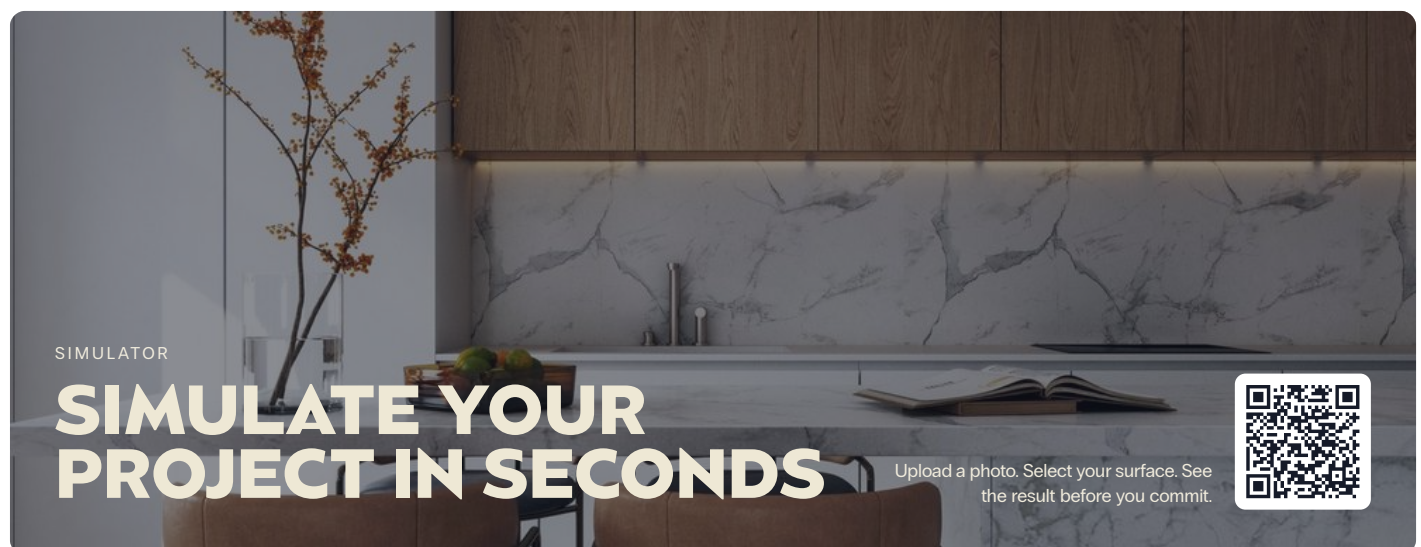

SIMULATOR

SIMULATE YOUR
PROJECT IN SECONDS

Upload a photo. Select your surface. See
the result before you commit.

