
Cover Styl

NP10

Alloy Loom



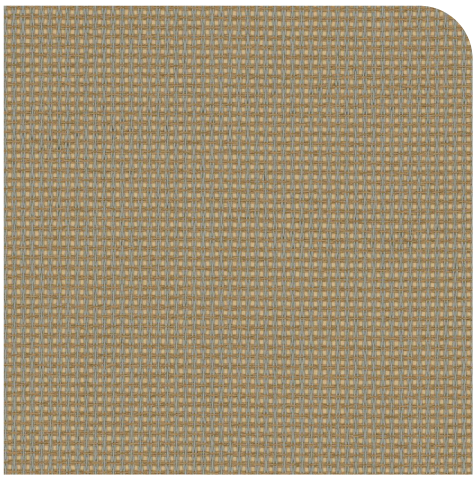

RANGE & FINISH

FAMILY	**Textile**	SUB-FAMILY	**Raffia**
FINISHES	**Premium**	SURFACE EFFECT	**Matt**

SAMPLES AVAILABLE

A5 SAMPLES

PREMIUM SAMPLES

CHARACTERISTICS

Width	**122 cm**
Length	**20 m**
Thickness	**940 µm**
Item weight	**340 g/m²**
Composition	**14**
Type of Adhesive	**Acrylic PSA with air release system**
Warranty	**5 years**
Storage Temperature	**5°C-30°C**
Storage in recommended conditions	**1 years**
Pattern Direction	**Not Visible**

PERFORMANCES

Scratch resistance	**Average**
Stains resistance	**Not Tested**
Thermal Resistance	**Not Tested**
Water and Moisture resistance	**Not Tested**
Color Fastness to light	**Not Tested**
Adhesion	**Not Tested**
Antibacterial properties	**Not Tested**
Washability	**Not Tested**

CERTIFICATIONS

CE (CPR 305/2011) **Compliant**	REACH / ROHS **Compliant**	FIRE RATING (EN13501-1) **D-s1,d0**	VOLATILE ORGANIC COMPOUNDS (EN16516) - A+ **Not Tested**
RESTRICTED SUBSTANCES **Not Tested**	IMO/MED MODUL B - E **Not Tested**	RAIL (EN45545-2, R1) **Not Tested**	EPD AVAILABLE **Not Available**

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation

Cover Styl

NP10

Alloy Loom

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	**Not Suitable**
Suitable for	**Interior**
Direct Water contact areas	**Not Suitable**
Pattern continuity across panels	**Yes, with care**
Imperfect surfaces	**Yes, with care**
High contact wear surfaces	**Not Suitable**

INSTALLATION

Installation Type	**Interior**
Installation Method	**Dry**
Installation Temperature	**12°C-38°C**
Installation Method (ABBA - ABAB)	**ABAB**


INSTALLATION GUIDELINES

- Cut carefully to minimise fraying of the textile surface.
- In overlap areas, gently heat the film to promote adhesion.
- In high-traffic areas, overlaps may be subject to lifting due to mechanical stress.
- On edges and raised surfaces, ensure complete adhesion without trapped air and wrap the material at least 10 mm around the edge, preferably further where possible.
- Minor liner shrinkage may occur while the product is stored on the roll; this does not affect the dimensional stability of the material once installed.
- After use, secure the roll tightly at a minimum of three points to prevent air channels from developing between the film and liner.
- For NG07 and NG09, due to their specific construction, slight colour variations may occur between adjacent sheets, even when taken from the same roll.

MAINTENANCE GUIDELINES

For Cork or Raffia references, minimal cleaning and care are required due to their natural resistance to dust and dirt. Use a brush with gentle bristles to clean.

In case of wet or damp stains, use an absorbent cloth to wipe away the moisture and promptly and thoroughly dry the affected area.

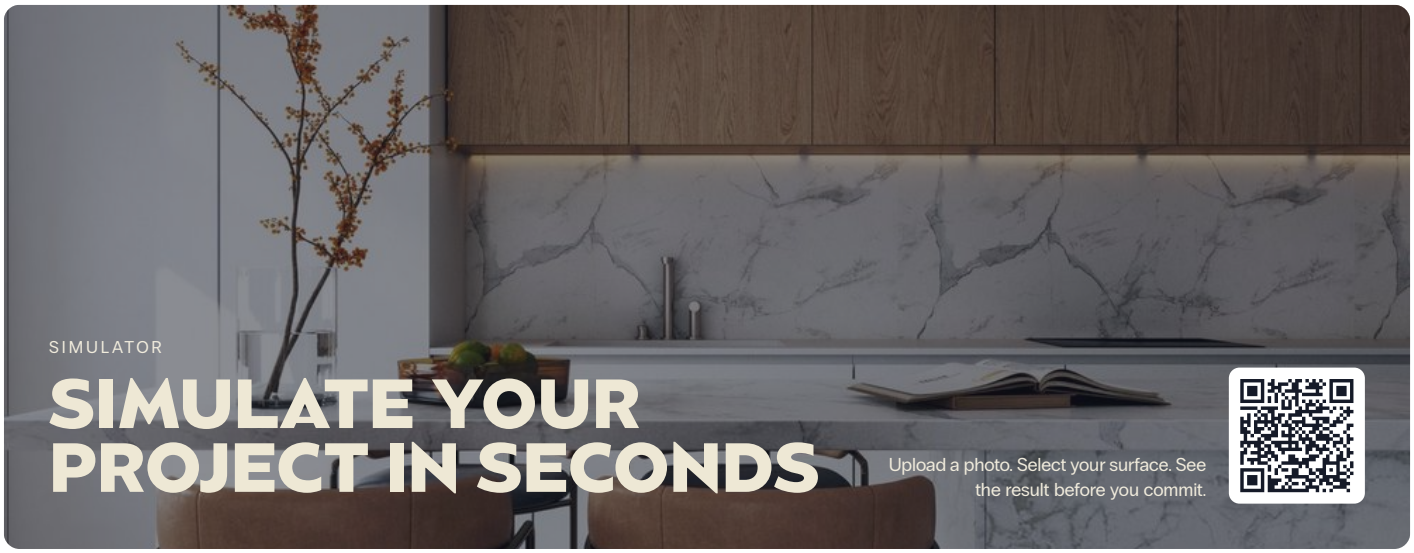

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation