



RANGE & FINISH

FAMILY	Wood	SUB-FAMILY	Medium
SURFACE EFFECT	Matt		

SAMPLES AVAILABLE

A5 SAMPLES

CHARACTERISTICS

Width	122 cm
Length	50 m
Thickness	220 µm
Item weight	195 g/m²
Composition	PP
Type of Adhesive	Acrylic PSA with air release system
Warranty	5 years
Storage Temperature	5°C-30°C
Storage in recommended conditions	2 years
Pattern Direction	Length

PERFORMANCES

Scratch resistance	High
Stains resistance	Not Tested
Thermal Resistance	Not Tested
Water and Moisture resistance	Not Tested
Color Fastness to light	Not Tested
Adhesion	Passed
Antibacterial properties	Not Tested
Washability	Not Tested

CERTIFICATIONS

CE (CPR 305/2011) Compliant	REACH / ROHS Compliant	FIRE RATING (EN13501-1) B-s1,d0	VOLATILE ORGANIC COMPOUNDS (EN16516) - A+ Compliant
RESTRICTED SUBSTANCES Not Tested	IMO/MED MODUL B - E Not Tested	RAIL (EN45545-2, R1) Not Tested	EPD AVAILABLE Not Available

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	Not Suitable
Suitable for	Interior
Direct Water contact areas	Yes
Pattern continuity across panels	Yes, with care
Imperfect surfaces	Yes, with care
High contact wear surfaces	Yes, with care

INSTALLATION

Installation Type	Interior
Installation Method	Dry
Installation Temperature	12°C-38°C
Installation Method (ABBA - ABAB)	ABBA
Pattern Repetition Length (cm)	112 cm
Overlap to match Layers (cm)	2 cm

INSTALLATION GUIDELINES


- PVC Free film features a high-tack adhesive. No primer is normally required on hard, properly prepared surfaces. Primer PRO may be required in overlap areas to ensure proper adhesion.
- The film is thinner than standard PVC films, making careful substrate preparation particularly important. Surface imperfections or colour variations may remain visible after installation.
- Due to the adhesive construction, adhesive residue may remain on the substrate during removal. For temporary applications, consider applying the product over a removable/low-cost film to reduce the risk of adhesive residue on the substrate.
- When wrapping edges / arris, heat the film and maintain a consistent temperature during the folding process to improve flexibility and reduce the risk of air channels along the edges.
- Do not overstretch or expose the film to excessive heat during or after installation, as this may cause cracking.
- Important: Always test the material and adhesion on the intended substrate before installation and follow the standard Cover Styl' Installation Guidelines for surface preparation and application procedures.

MAINTENANCE GUIDELINES

For daily care, use a mild soap or pH-neutral detergent to clean the film's surface. Avoid using products with extremely acidic or basic pH levels, as they can harm the material. When cleaning the film surface, only use soft cloths or sponges to prevent any damage.

For stubborn stains, apply hot water (not boiling) to the affected area. If necessary, use a cleaning solution composed of 70% isopropyl alcohol and 30% water, applied with a melamine sponge.

For sanitizing, use only isopropyl alcohol-based products like Isopropyl Alcohol Wipes (not for daily use). Avoid organic-based cleaners like ammonia or polish, as they can damage vinyl. Test any cleaning detergents, bactericides, or virucidal products on a hidden area first to ensure compatibility.

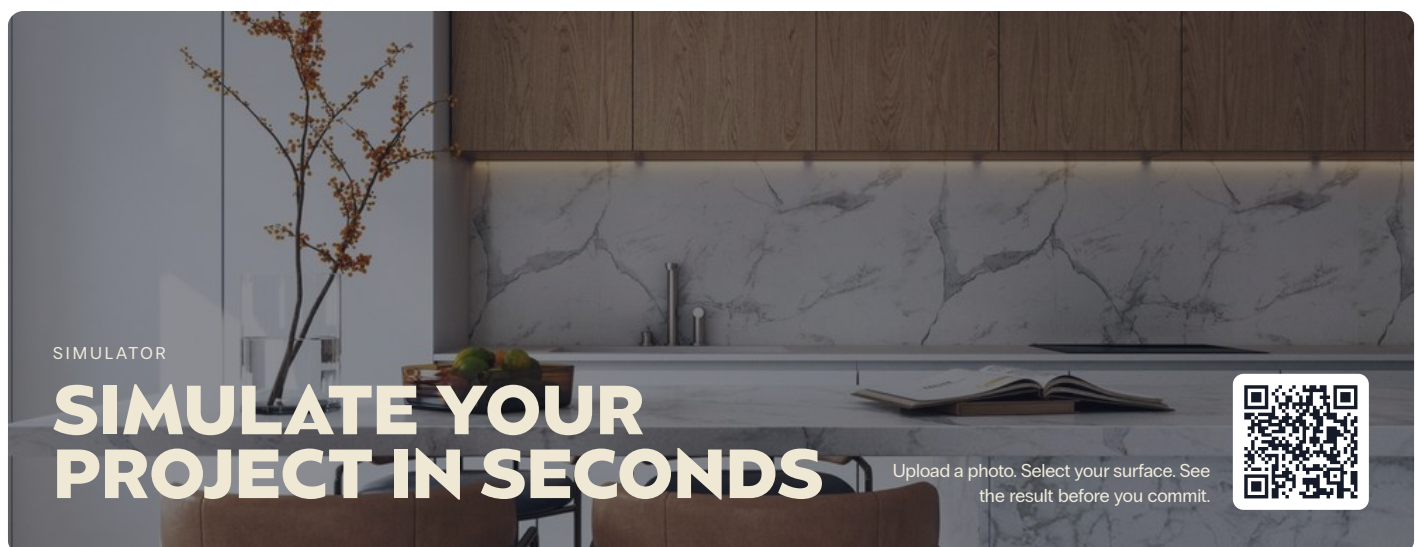

SIMULATOR

SIMULATE YOUR PROJECT IN SECONDS

Upload a photo. Select your surface. See the result before you commit.

