
Cover Styl

PF-U19

PVC Free - Urban Gray

ALSO AVAILABLE IN ORIGINAL | HIGH RESISTANCE



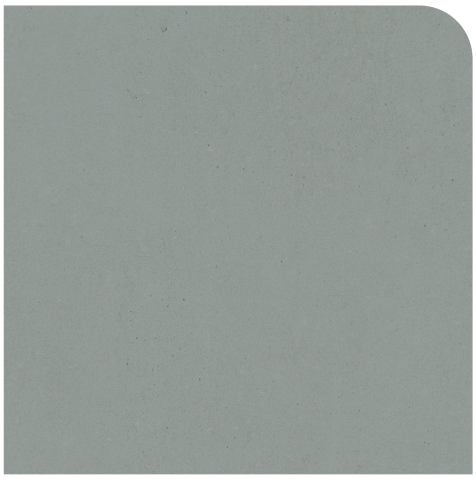

RANGE & FINISH

FAMILY	**Stone**	SUB-FAMILY	**Cement**
SURFACE EFFECT	**Matt**		

SAMPLES AVAILABLE

A5 SAMPLES

CHARACTERISTICS

Width	**122 cm**
Length	**50 m**
Thickness	**220 µm**
Item weight	**195 g/m²**
Composition	**PP**
Type of Adhesive	**Acrylic PSA with air release system**
Warranty	**5 years**
Storage Temperature	**5°C-30°C**
Storage in recommended conditions	**2 years**
Pattern Direction	**Not Visible**

PERFORMANCES

Scratch resistance	**High**
Stains resistance	**Not Tested**
Thermal Resistance	**Not Tested**
Water and Moisture resistance	**Not Tested**
Color Fastness to light	**Not Tested**
Adhesion	**Passed**
Antibacterial properties	**Not Tested**
Washability	**Not Tested**

CERTIFICATIONS

CE (CPR 305/2011) **Compliant**	REACH / ROHS **Compliant**	FIRE RATING (EN13501-1) **B-s1,d0**	VOLATILE ORGANIC COMPOUNDS (EN16516) - A+ **Compliant**
RESTRICTED SUBSTANCES Not Tested	IMO/MED MODUL B - E Not Tested	RAIL (EN45545-2, R1) Not Tested	EPD AVAILABLE **Not Available**

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation

Cover Styl

PF-U19

PVC Free - Urban Gray

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	**Not Suitable**
Suitable for	**Interior**
Direct Water contact areas	**Yes**
Pattern continuity across panels	**Yes, with care**
Imperfect surfaces	**Yes, with care**
High contact wear surfaces	**Yes, with care**

INSTALLATION

Installation Type	**Interior**
Installation Method	**Dry**
Installation Temperature	**12°C-38°C**
Installation Method (ABBA - ABAB)	**ABAB**
Pattern Repetition Length (cm)	**112 cm**

INSTALLATION GUIDELINES


- PVC Free film features a high-tack adhesive. No primer is normally required on hard, properly prepared surfaces. Primer PRO may be required in overlap areas to ensure proper adhesion.
- The film is thinner than standard PVC films, making careful substrate preparation particularly important. Surface imperfections or colour variations may remain visible after installation.
- Due to the adhesive construction, adhesive residue may remain on the substrate during removal. For temporary applications, consider applying the product over a removable/low-cost film to reduce the risk of adhesive residue on the substrate.
- When wrapping edges / arris, heat the film and maintain a consistent temperature during the folding process to improve flexibility and reduce the risk of air channels along the edges.
- Do not overstretch or expose the film to excessive heat during or after installation, as this may cause cracking.
- Important: Always test the material and adhesion on the intended substrate before installation and follow the standard Cover Styl' Installation Guidelines for surface preparation and application procedures.

MAINTENANCE GUIDELINES

For daily care, use a mild soap or pH-neutral detergent to clean the film's surface. Avoid using products with extremely acidic or basic pH levels, as they can harm the material. When cleaning the film surface, only use soft cloths or sponges to prevent any damage.

For stubborn stains, apply hot water (not boiling) to the affected area. If necessary, use a cleaning solution composed of 70% isopropyl alcohol and 30% water, applied with a melamine sponge.

For sanitizing, use only isopropyl alcohol-based products like Isopropyl Alcohol Wipes (not for daily use). Avoid organic-based cleaners like ammonia or polish, as they can damage vinyl. Test any cleaning detergents, bactericides, or virucidal products on a hidden area first to ensure compatibility.

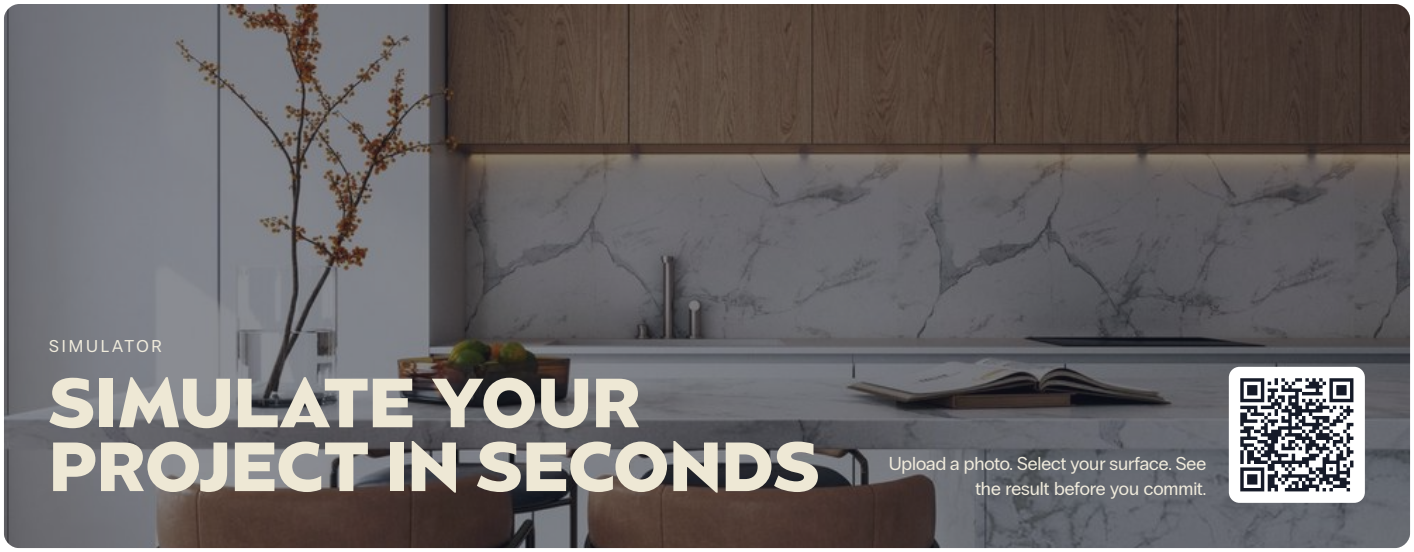

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation