



RANGE & FINISH

FAMILY **Glitter**
FINISHES **Standard**

SUB-FAMILY **Glitter**
SURFACE EFFECT **Glitter**

SAMPLES AVAILABLE

A5 SAMPLES

PREMIUM SAMPLES

CHARACTERISTICS

Width	122 cm
Length	30 m
Thickness	400 µm
Item weight	320 g/m²
Composition	PET
Type of Adhesive	Acrylic PSA with air release system
Warranty	10 years
Storage Temperature	5°C-30°C
Storage in recommended conditions	2 years
Pattern Direction	Not Visible

PERFORMANCES

Scratch resistance	Average
Stains resistance	Passed
Thermal Resistance	Passed
Water and Moisture resistance	Not Compliant
Color Fastness to light	Not Tested
Adhesion	Passed
Antibacterial properties	Not Tested
Washability	Not Tested

CERTIFICATIONS

CE (CPR 305/2011)
Compliant

REACH / ROHS
Compliant

FIRE RATING (EN13501-1)
D-s1,d0

VOLATILE ORGANIC COMPOUNDS
(EN16516) - A+
Not Tested

RESTRICTED SUBSTANCES
Not Tested

IMO/MED MODUL B - E
Not Compliant

RAIL (EN45545-2, R1)
Not Tested

EPD AVAILABLE
Not Available

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	Not Suitable
Suitable for	Interior
Direct Water contact areas	Not Suitable
Pattern continuity across panels	Yes
Imperfect surfaces	Yes, with care
High contact wear surfaces	Yes, with care

INSTALLATION

Installation Type	Interior
Installation Method	Dry
Installation Temperature	12°C-38°C
Installation Method (ABBA - ABAB)	ABBA

INSTALLATION GUIDELINES


- Overlapping is not permitted. Use butt-joint (edge-to-edge) installation only.
- For temporary applications, consider applying the product over a removable/low-cost film to reduce the risk of adhesive residue on the substrate.
- Due to the specific construction of the product, slight color or glitter variations may be visible between adjacent panels. These are inherent characteristics of the product and are not considered defects.
- Install all panels in the same unwind direction to maintain maximum visual consistency.

MAINTENANCE GUIDELINES

For daily care, use a mild soap or pH-neutral detergent to clean the film's surface. Avoid using products with extremely acidic or basic pH levels, as they can harm the material. When cleaning the film surface, only use soft cloths or sponges to prevent any damage.

For stubborn stains, apply hot water (not boiling) to the affected area. If necessary, use a cleaning solution composed of 70% isopropyl alcohol and 30% water, applied with a melamine sponge.

For sanitizing, use only isopropyl alcohol-based products like Isopropyl Alcohol Wipes (not for daily use). Avoid organic-based cleaners like ammonia or polish, as they can damage vinyl. Test any cleaning detergents, bactericides, or virucidal products on a hidden area first to ensure compatibility.

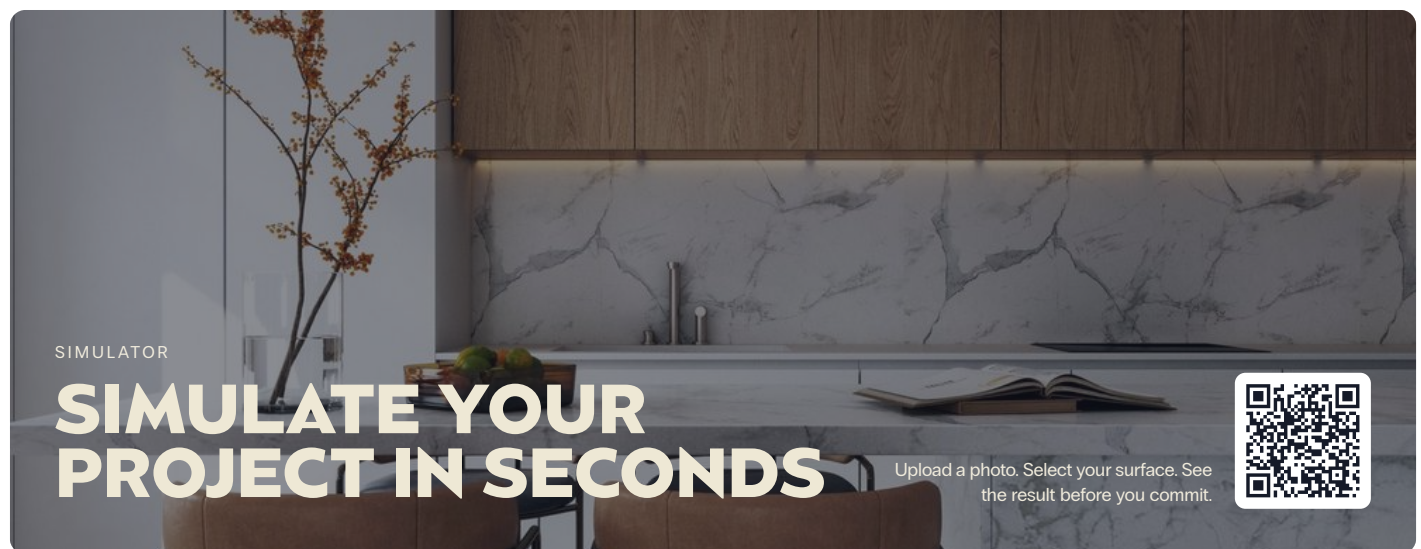

SIMULATOR

SIMULATE YOUR PROJECT IN SECONDS

Upload a photo. Select your surface. See the result before you commit.

