
Cover Styl

Shield



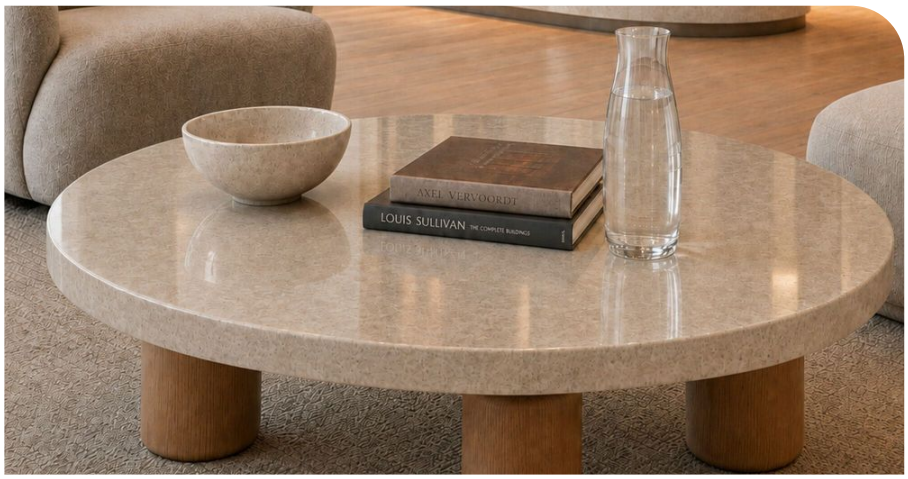

RANGE & FINISH

FAMILY	**Surface Protection**	SUB-FAMILY	**Transparent**
SURFACE EFFECT	**Gloss**		

SAMPLES AVAILABLE

A5 SAMPLES

CHARACTERISTICS

Width	**152 cm**
Length	**15 m**
Thickness	**195 µm**
Composition	**PU**
Type of Adhesive	**Acrylic PSA with air release system**
Warranty	**5 years**
Storage Temperature	**12°C-38°C**
Storage in recommended conditions	**2 years**

PERFORMANCES

Scratch resistance	**High**
Stains resistance	**Passed**
Thermal Resistance	**Passed**
Water and Moisture resistance	**Passed**
Color Fastness to light	**Passed**
Washability	**Passed**

CERTIFICATIONS

REACH / ROHS	OVERALL MIGRATION	ISOCYANATES AND BISPHENOLS
Compliant	**Compliant**	**Compliant**

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation

Cover Styl

Shield

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	**Yes**
Suitable for	**Interior**
Direct Water contact areas	**Yes**
Pattern continuity across panels	**Yes**
Imperfect surfaces	**Yes**
High contact wear surfaces	**Yes**

INSTALLATION

Installation Type	**Interior**
Installation Method	**Wet**
Installation Temperature	**12°C-38°C**
Installation Method (ABBA - ABAB)	**ABAB**

INSTALLATION GUIDELINES

- Pre-installation Test: Test on the intended substrate, especially over decorative films. Allow to dry completely before checking appearance, adhesion and compatibility. Do not install it on absorbent surfaces not sealed.
- Wet Installation Solutions:

1.Slip: Distilled water + Film On (3 ml/L) allowing the film to slide and be repositioned during installation.
2.Tack: Distilled water + 10-15% IPA to improve adhesion during initial positioning allowing the film to slide along edges before trimming, or in critical areas.

- Wet Application: Apply Slip Solution to the substrate and adhesive side. Use a squeegee (150-PP3 or 150-PP6) from centre to edges to remove water and air.
- 90° & Rounded Corners: Avoid stretching. Use relief cuts or separate pieces to prevent tension. Do not overlap Cover Styl Shield.
- Curved Surfaces: Gently pre-stretch the film before application to adapt it to the shape of the substrate, avoiding stretching during application.
- Trimming & Edges: Trim approximately 1 mm before the outer edge using a sharp blade. Ensure edges are firmly adhered and tension-free. Avoid 45° cut.
- Final Inspection: Rinse edges with Tack Solution or water to remove Slip residues. Allow adhesion to stabilize and check for moisture, bubbles or lifting edges.

MAINTENANCE GUIDELINES

- Maintenance: For daily care, use a mild soap or pH-neutral detergent to clean the film's surface. Avoid using products with extremely acidic or basic pH levels, as they can harm the material. When cleaning the film surface, only use soft cloths or sponges to prevent any damage. For stubborn stains, apply hot water (not boiling) to the affected area. If necessary, use a cleaning solution composed of 70% isopropyl alcohol and 30% water, applied with a melamine sponge.
- Removal: Gently heat the film and peel it off slowly at a low angle to minimize the risk of damaging the underlying surface. Removal from high-surface-energy substrates or PVC decorative films may leave adhesive residue, which can be cleaned using a suitable adhesive remover. Caution: Removal from lacquered surfaces or natural wood may damage the underlying finish.

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation