Cover Styl

W102

Large Grain





RANGE & FINISH

FAMILY	**Organic**	SUB-FAMILY	**Cork**
FINISHES	**Prestige**	SURFACE EFFECT	**Matt**

SAMPLES AVAILABLE

A5 SAMPLES

PREMIUM SAMPLES

CHARACTERISTICS

Width	**122 cm**
Length	**20 m**
Thickness	**550 µm**
Item weight	**400 - 450 g/m²**
Composition	**PVC**
Type of Adhesive	**Acrylic PSA with air release system**
Warranty	**5 years**
Storage Temperature	**5°C-30°C**
Storage in recommended conditions	**3 years**
Pattern Direction	**Not Visible**

PERFORMANCES

Scratch resistance	**Average**
Stains resistance	**Passed**
Thermal Resistance	**Passed**
Water and Moisture resistance	**Not Compliant**
Color Fastness to light	**Not Tested**
Adhesion	**Passed**
Antibacterial properties	**Not Tested**
Washability	**Not Tested**

CERTIFICATIONS

CE (CPR 305/2011) **Compliant**	REACH / ROHS **Compliant**	FIRE RATING (EN13501-1) **D-s2,d0**	VOLATILE ORGANIC COMPOUNDS (EN16516) - A+ **Compliant**
RESTRICTED SUBSTANCES **Not Tested**	IMO/MED MODUL B - E **Not Compliant**	RAIL (EN45545-2, R1) **Not Tested**	EPD AVAILABLE **Not Available**

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation

Cover Styl

W102

Large Grain

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	**Not Suitable**
Suitable for	**Interior**
Direct Water contact areas	**Not Suitable**
Pattern continuity across panels	**Yes, with care**
Imperfect surfaces	**Yes, with care**
High contact wear surfaces	**Yes, with care**

INSTALLATION

Installation Type	**Interior**
Installation Method	**Dry**
Installation Temperature	**12°C-38°C**
Installation Method (ABBA - ABAB)	**ABAB**


INSTALLATION GUIDELINES

- Minor gaps or irregularities in the natural cork surface are inherent characteristics of the product and are not considered defects.
- Apply only to flat, planar surfaces. Do not stretch or thermoform the material.
- Avoid rolling the material too tightly, as excessive pressure may damage or crack the cork layer.
- Pre-cutting is recommended due to the rigidity and thickness of the material.
- In overlap areas, apply primer and consider sealing exposed joints or edges.
- Apply using a hard or soft roller. Avoid tools that may scratch or abrade the cork surface.
- In case of stains, dab the surface immediately. Due to its natural cork composition, the surface cannot be cleaned in the same way as standard films.

MAINTENANCE GUIDELINES

For Cork or Raffia references, minimal cleaning and care are required due to their natural resistance to dust and dirt. Use a brush with gentle bristles to clean.

In case of wet or damp stains, use an absorbent cloth to wipe away the moisture and promptly and thoroughly dry the affected area.

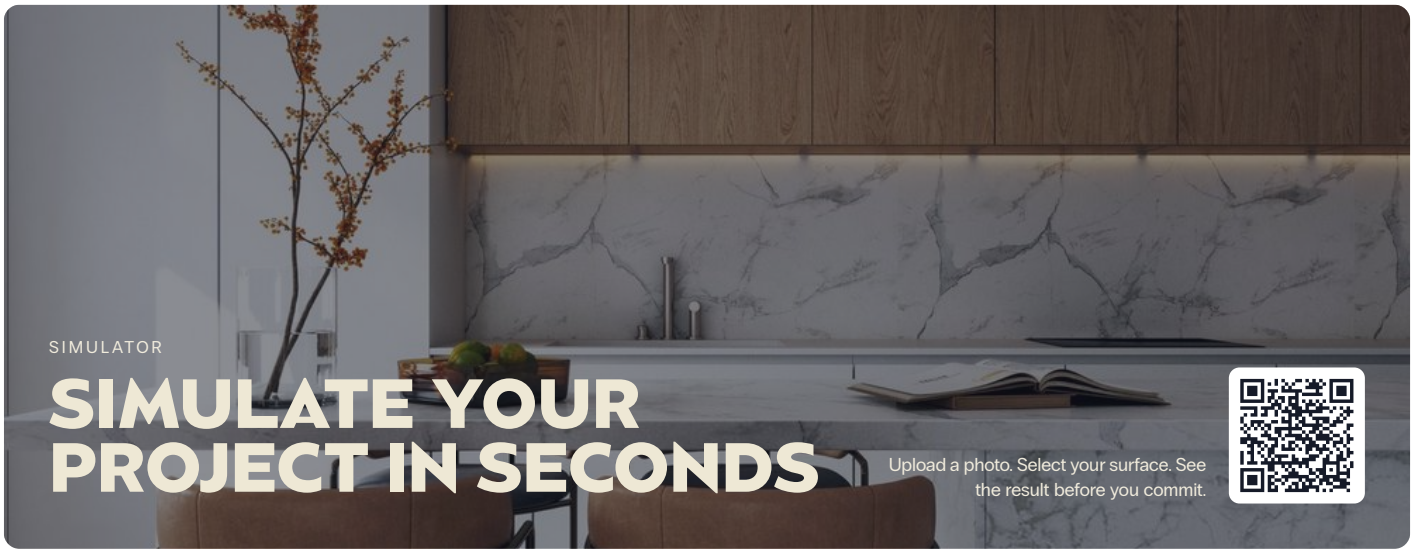

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation