



RANGE & FINISH

FAMILY	Organic	SUB-FAMILY	Cork
FINISHES	Prestige	SURFACE EFFECT	Matt

SAMPLES AVAILABLE

[A5 SAMPLES](#)[PREMIUM SAMPLES](#)

CHARACTERISTICS

Width	122 cm
Length	20 m
Thickness	550 µm
Item weight	400 - 450 g/m²
Composition	PVC
Type of Adhesive	Acrylic PSA with air release system
Warranty	5 years
Storage Temperature	5°C-30°C
Storage in recommended conditions	3 years
Pattern Direction	Not Visible

PERFORMANCES

Scratch resistance	Average
Stains resistance	Passed
Thermal Resistance	Passed
Water and Moisture resistance	Not Compliant
Color Fastness to light	Not Tested
Adhesion	Passed
Antibacterial properties	Not Tested
Washability	Not Tested

CERTIFICATIONS

CE (CPR 305/2011) Compliant	REACH / ROHS Compliant	FIRE RATING (EN13501-1) D-s2,d0	VOLATILE ORGANIC COMPOUNDS (EN16516) - A+ Compliant
RESTRICTED SUBSTANCES Not Tested	IMO/MED MODUL B - E Not Compliant	RAIL (EN45545-2, R1) Not Tested	EPD AVAILABLE Not Available

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	Not Suitable
Suitable for	Interior
Direct Water contact areas	Not Suitable
Pattern continuity across panels	Yes, with care
Imperfect surfaces	Yes, with care
High contact wear surfaces	Yes, with care

INSTALLATION

Installation Type	Interior
Installation Method	Dry
Installation Temperature	12°C-38°C
Installation Method (ABBA - ABAB)	ABBA


INSTALLATION GUIDELINES

- Minor gaps or irregularities in the natural cork surface are inherent characteristics of the product and are not considered defects.
- Apply only to flat, planar surfaces. Do not stretch or thermoform the material.
- Avoid rolling the material too tightly, as excessive pressure may damage or crack the cork layer.
- Pre-cutting is recommended due to the rigidity and thickness of the material.
- In overlap areas, apply primer and consider sealing exposed joints or edges.
- Apply using a hard or soft roller. Avoid tools that may scratch or abrade the cork surface.
- In case of stains, dab the surface immediately. Due to its natural cork composition, the surface cannot be cleaned in the same way as standard films.

MAINTENANCE GUIDELINES

For Cork or Raffia references, minimal cleaning and care are required due to their natural resistance to dust and dirt. Use a brush with gentle bristles to clean.

In case of wet or damp stains, use an absorbent cloth to wipe away the moisture and promptly and thoroughly dry the affected area.

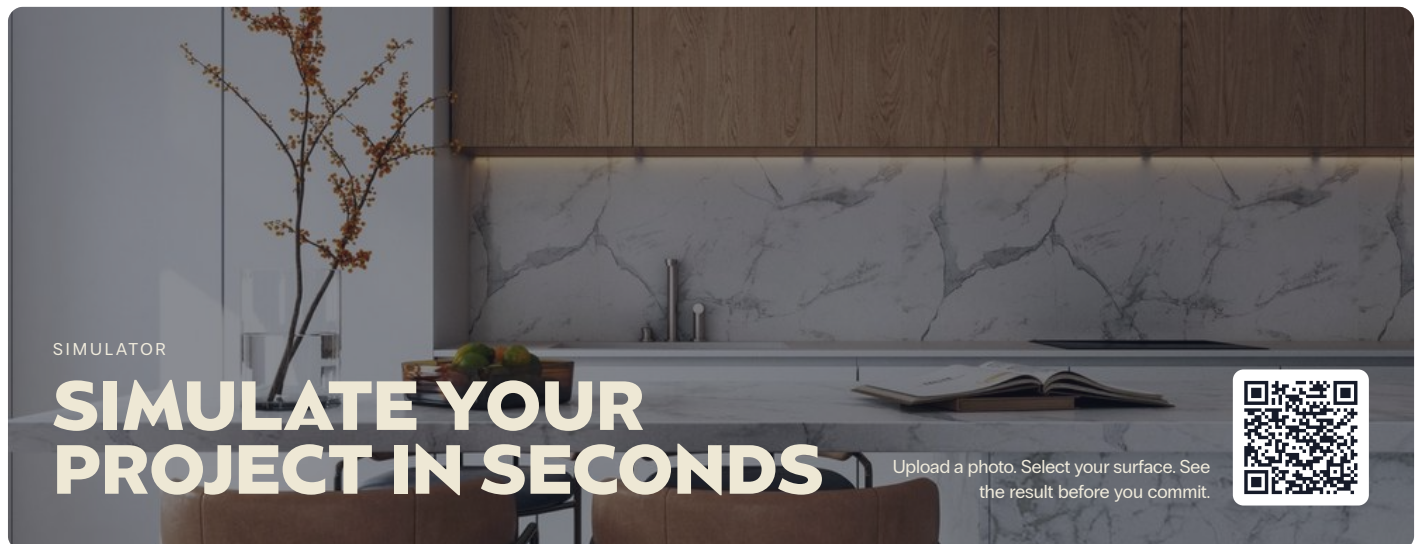

SIMULATOR

SIMULATE YOUR PROJECT IN SECONDS

Upload a photo. Select your surface. See the result before you commit.

