Cover Styl

Z15

Bronze Oak





RANGE & FINISH

FAMILY	**Wood**	SUB-FAMILY	**Medium**
SURFACE EFFECT	**Satin**		

SAMPLES AVAILABLE

A5 SAMPLES

PREMIUM SAMPLES

CHARACTERISTICS

Width	**122 cm**
Length	**50 m**
Thickness	**250 µm**
Item weight	**240 g/m²**
Composition	**PMMA + PVDF**
Type of Adhesive	**Acrylic PSA with air release system**
Warranty	**12 years**
Storage Temperature	**5°C-30°C**
Storage in recommended conditions	**2 years**
Pattern Direction	**Length**

PERFORMANCES

Scratch resistance	**High**
Stains resistance	**Not Tested**
Thermal Resistance	**Not Tested**
Water and Moisture resistance	**Not Tested**
Color Fastness to light	**Not Tested**
Adhesion	**Passed**
Antibacterial properties	**Not Tested**
Washability	**Not Tested**

CERTIFICATIONS

CE (CPR 305/2011) Not Required	REACH / ROHS **Compliant**	FIRE RATING (EN13501-1) **D-s1,d0**	VOLATILE ORGANIC COMPOUNDS (EN16516) - A+ Not Tested
RESTRICTED SUBSTANCES Not Tested	IMO/MED MODUL B - E Not Tested	RAIL (EN45545-2, R1) Not Tested	EPD AVAILABLE **Not Available**

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation

Cover Styl

Z15

Bronze Oak

APPLICATION, INSTALLATION & MAINTAINANCE

APPLICATION COMPATIBILITY

Stretchable	**No**
Suitable for	**Interior / Exterior**
Direct Water contact areas	**Yes**
Pattern continuity across panels	**Yes**
Imperfect surfaces	**Yes, with care**
High contact wear surfaces	**Yes**

INSTALLATION


Installation Type	**Interior / Exterior**
Installation Method	**Dry**
Installation Temperature	**15°C-30°C**
Installation Method (ABBA - ABAB)	**ABAB**
Pattern Repetition Length (cm)	**123 cm**
Overlap to match Layers (cm)	**10.5 cm**

INSTALLATION GUIDELINES

- Cover Styl Exterior films are specifically designed for exterior applications such as building façades, cladding, panels and window frames.
- Recommended substrates include ACP, anodized or powder-coated aluminium, steel, HPL and PVC/plastic, provided the surface is smooth, properly prepared and offers sufficient surface energy.
- Application is not recommended on rough, porous or low-energy substrates, such as untreated wood, mineral boards, cement, concrete, mortar, natural stone, poorly adhered paint or unsuitable painted/waterproof surfaces.
- Thorough surface preparation and cleaning are essential. Remove dirt, organic contamination, grease and any residues that could compromise adhesion.
- Always perform an adhesion test before installation to confirm substrate compatibility and determine the appropriate primer.
- Primer application is mandatory and should be applied at least around the perimeter and critical areas. For overlaps on the Advanced range, Primer+ is particularly recommended due to the protective PVDF coating.
- Where possible, prefer butt joints (edge-to-edge) instead of overlaps between sheets.
- Installation must be carried out between 10°C and 35°C, with 15°C to 30°C recommended for optimal application conditions.
- Before installation, inspect the substrate for corrosion, damage, poorly adhered coatings or contamination and correct any issues before applying the film.
- Important: Exterior applications require specific substrate assessment, preparation, installation, finishing and maintenance procedures. For complete instructions, approved installation methods, warranty conditions, durability, care and maintenance, always refer to the Cover Styl Exterior Guidelines.

MAINTENANCE GUIDELINES

For Exterior films, periodic cleaning is recommended to maintain the film's appearance and durability.
Prefer hand cleaning with a mild, pH-balanced detergent and a soft cloth or sponge, followed by thorough rinsing with clean water.
If using a pressure washer, maintain a distance of at least 300 mm, keep the pressure below 1,200 psi, the water temperature below 80°C, and spray perpendicularly (90°) to the surface to avoid lifting the film edges.
Avoid abrasive tools, strong solvents and harsh chemicals. For the complete cleaning procedure and recommendations, refer to the Cover Styl Exterior Guidelines.
These recommendations will maintain the film's appearance and extend its lifespan. Persistent stains may indicate inadequate care, in which case, consider using a patch repair method (not guaranteed but effective and economical) or replacing the entire vinyl.

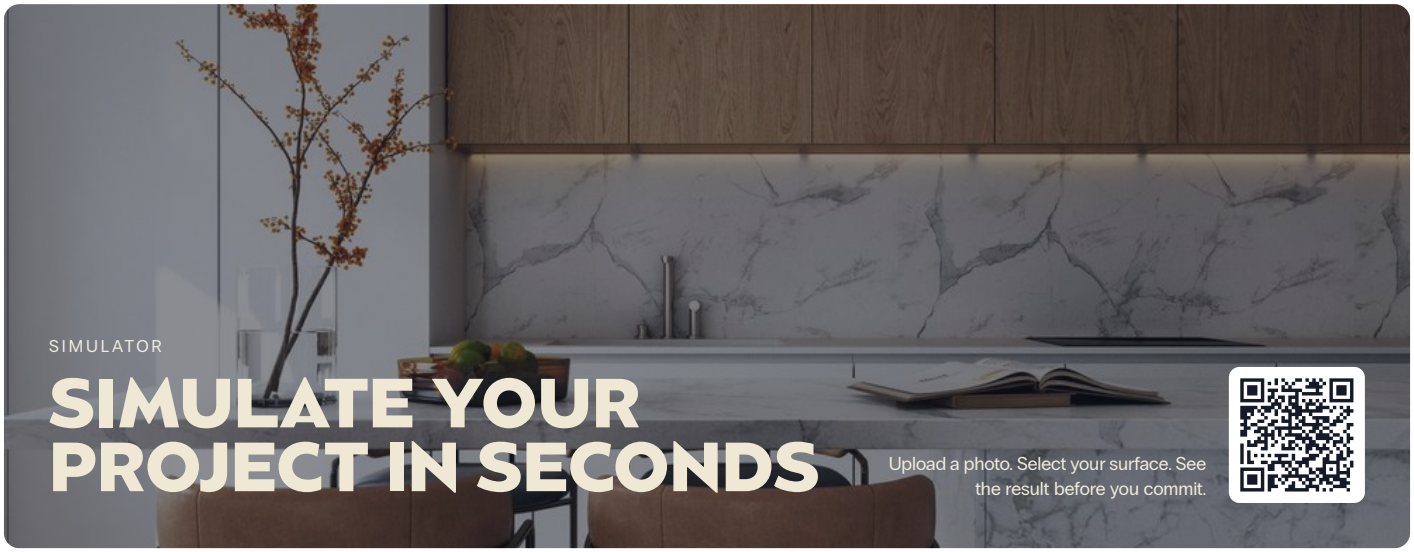

Non-contractual visuals and data, Cover Styl reserves the right to change the composition of its films at any time. The rendition of the colours and finishes on the computer may vary according to the screen and not give a true representation of the true appearance. We therefore recommend you order a sample on line or contact us so that we can examine the finish that best adapts to your requirements. Due to the slight differences in colour in production runs, we advise you to purchase the amount you require in one go to avoid any difference in appearance in the execution of your Cover Styl project.

Certified B Corporation